



Electrical Characteristics Data

(CHW Series)

● **1000 hours durability characteristics (85°C 2.5V)**

CHW-2R7505R-TW 2.7V 5F/10x20



Place the product in an 85°C/85% temperature and humidity chamber, apply a voltage of 2.5V. Periodically remove the product for performance testing.

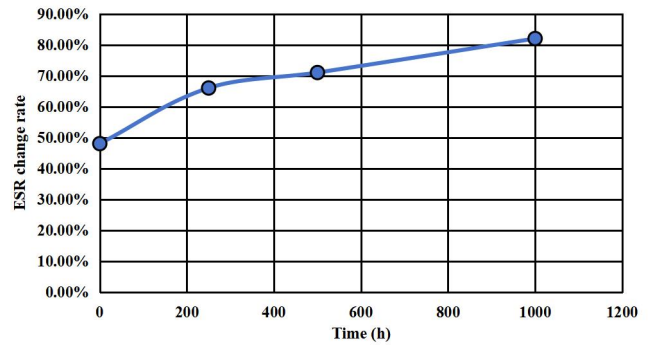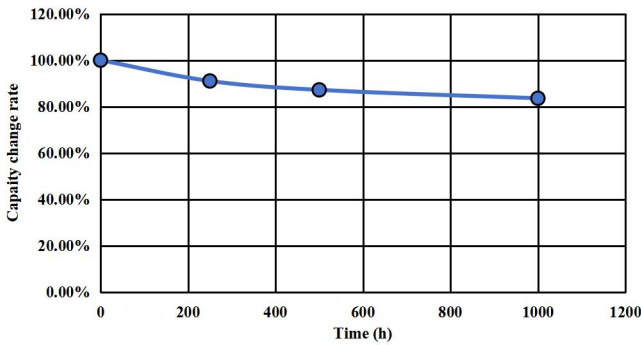

● **1000 hours constant temperature and humidity load characteristics (Temperature 85°C, humidity 85%)**

CHW-2R7505R-TW 2.7V 5F/10x20



Place the product in an 85°C/85% temperature and humidity chamber, apply a voltage of 2.5V. Periodically remove the product for performance testing.

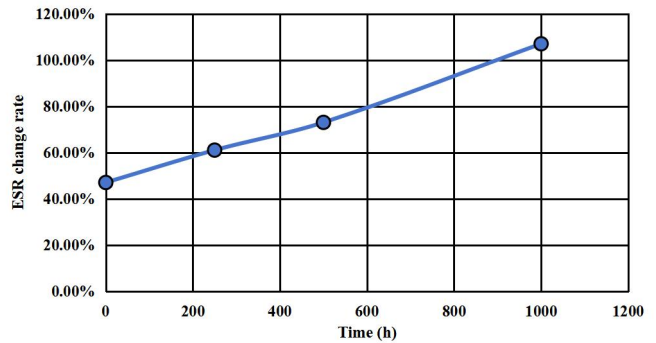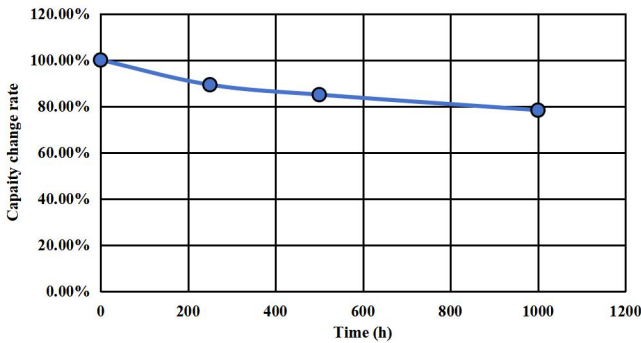

● **1000 hours high-temperature storage characteristics (85°C)**

CHW-2R7505R-TW 2.7V 5F/10x20

Place product in 85°C oven, no voltage. Regularly test performance.

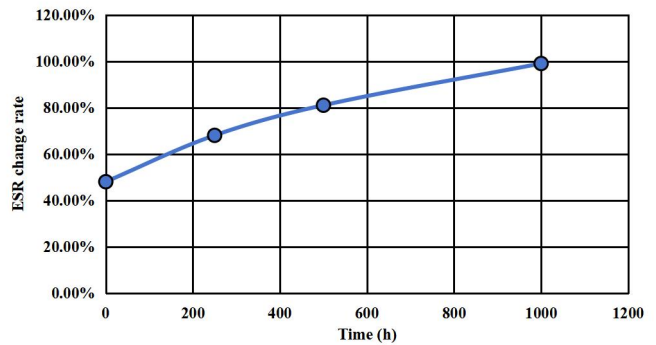
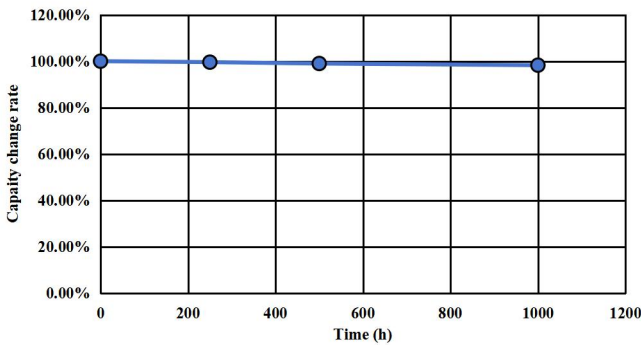


Note: If there are changes to the test data, we regret to inform you that no separate notification will be provided. We recommend obtaining technical specifications from CDA to ensure the component suits your needs.

•500 hours steady-state humid-heat characteristics (Temperature 40°C, humidity 95%)

CHW-2R7505R-TW 2.7V 5F/10x20



Place the product in an 85°C oven without voltage, regularly testing its performance.

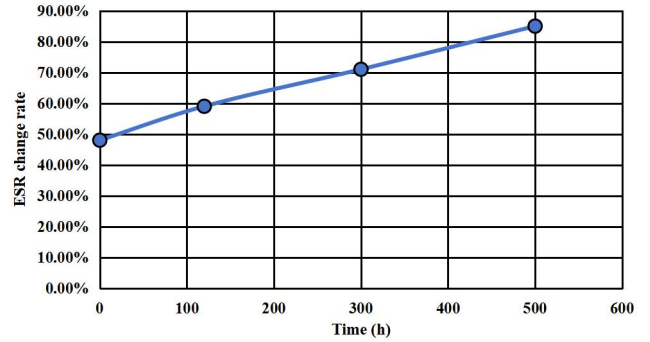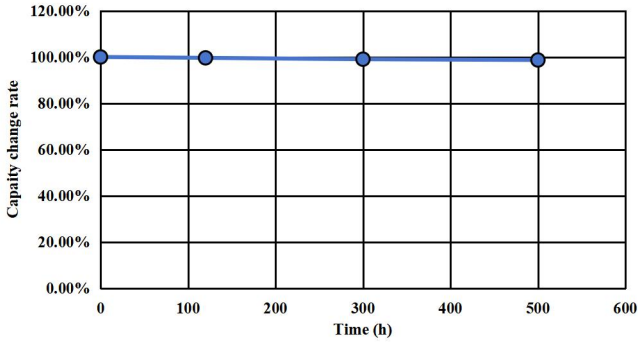

•thermal characteristics (-45 ~ +85°C)

CHW-2R7505R-TW 2.7V 5F/10x20

Place the product in an 85°C oven without voltage, regularly testing its performance.

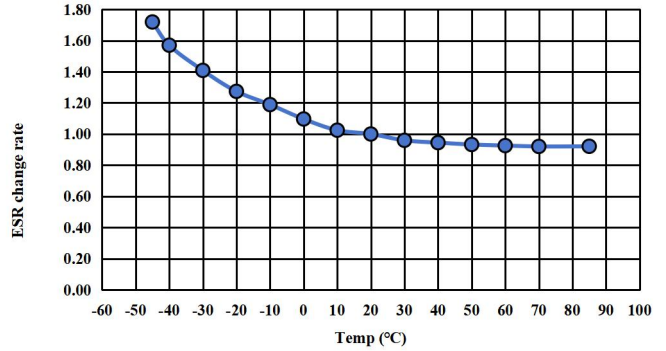
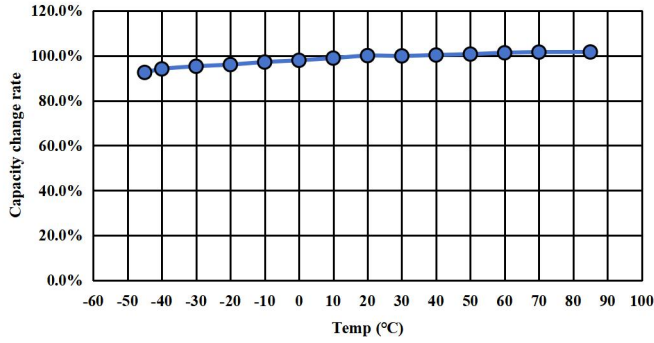


Note: If there are changes to the test data, we regret to inform you that no separate notification will be provided. We recommend obtaining technical specifications from CDA to ensure the component suits your needs.

●1000 hours durability characteristics (85°C 2.5V)

CHW-2R7156R-TWX 2.7V 5F/12.5x25



Place the product to 85°C in an oven, apply 2.5V, and periodically test performance.

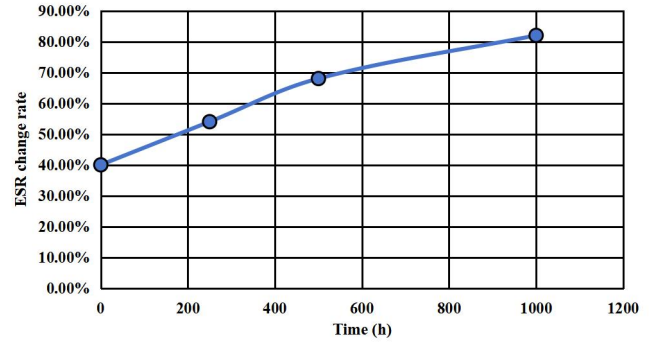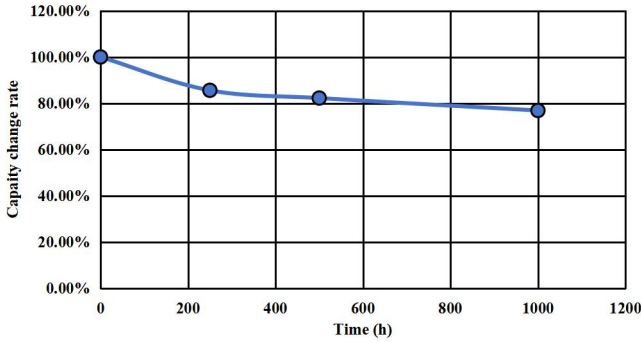

●1000-hour Temperature and Humidity Endurance Test (Temperature 85°C, humidity 85%)

CHW-2R7156R-TWX 2.7V 5F/12.5x25



Place the product to 85°C/85% RH in a chamber, apply 2.5V, and periodically test performance.

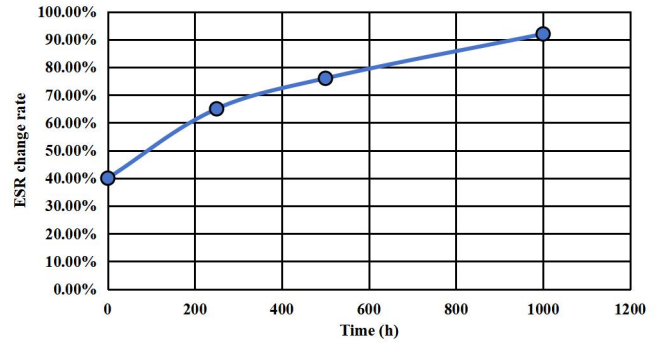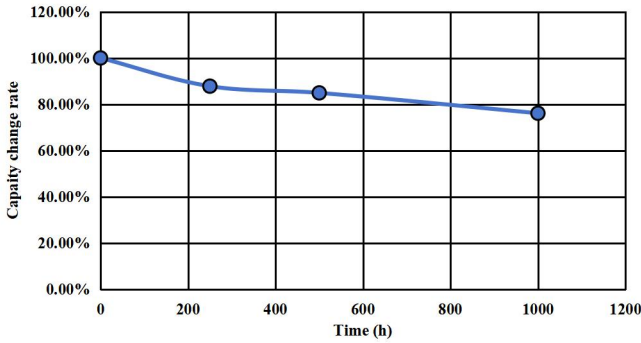

●1000-hour High-Temperature Storage Characteristics (85°C)

CHW-2R7156R-TWX 2.7V 5F/12.5x25

Place the product in an 85°C convection oven without voltage, and periodically test performance.

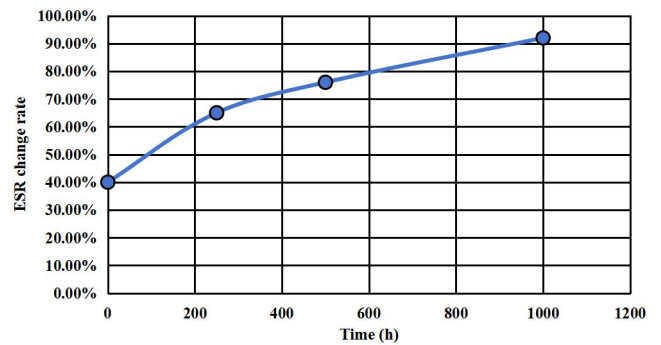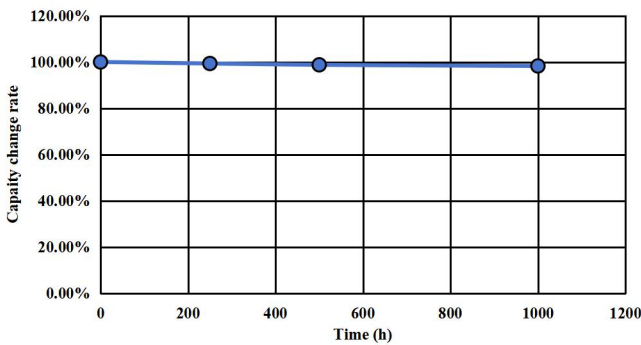

*The above data is for reference. If the model parameters you require are not available, please contact CDA

Note: If there are changes to the test data, we regret to inform you that no separate notification will be provided. We recommend obtaining technical specifications from CDA to ensure the component suits your needs.