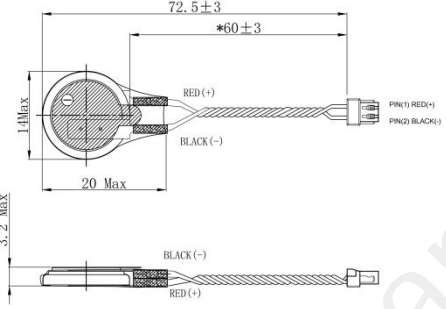
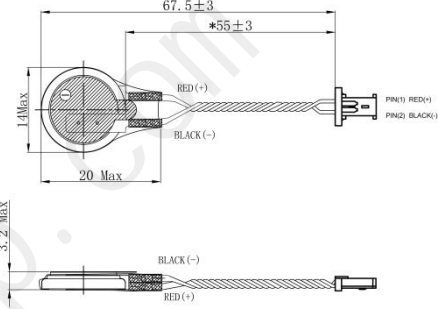
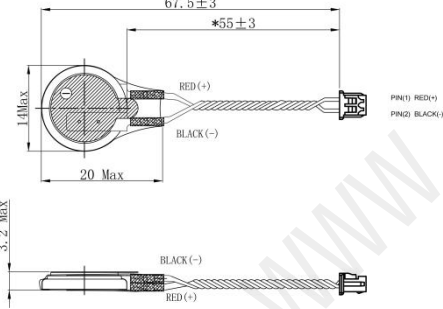
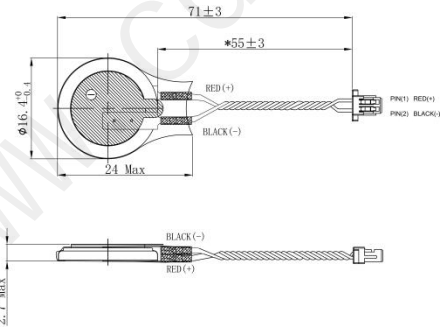
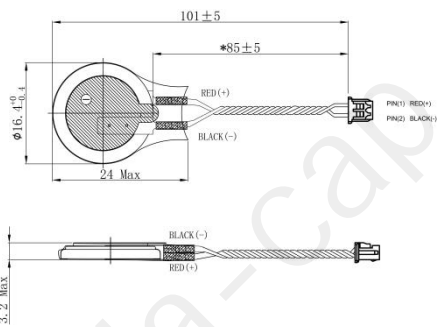
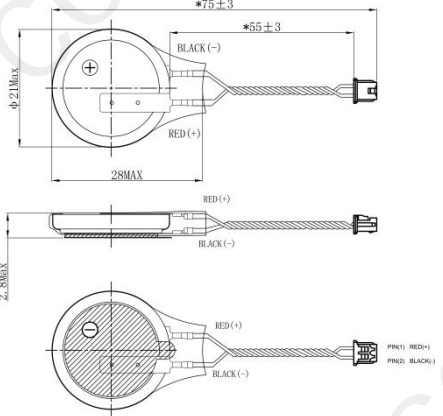
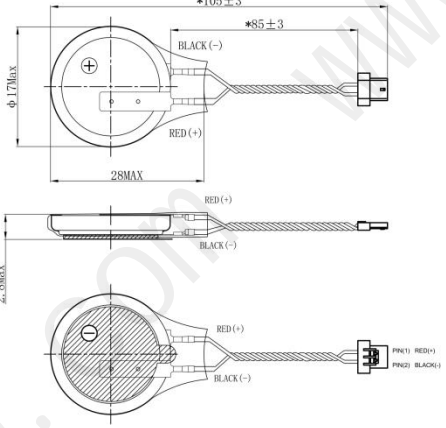
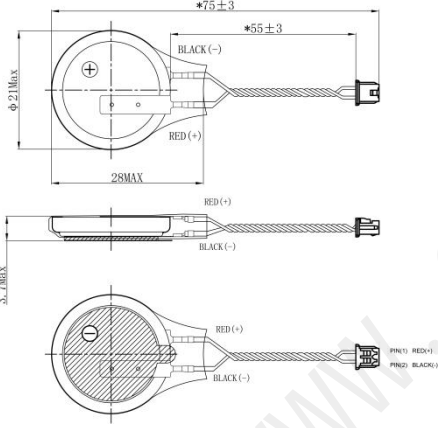
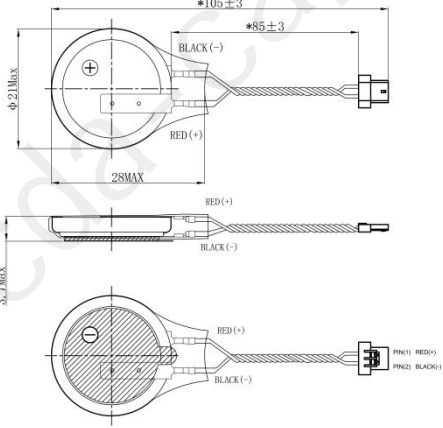


Dimensions with terminals and wire connector (Unit: mm)

CR1220W/1CPT6	CR1220W/1BT55	CR1220W/1ST55
 <p>Lead wire: UL10625/32AWG Connector: ACES 50375 Adhesive: 3M 9888T+black PE; φ10*0.5 with ears</p>	 <p>Lead wire: UL3302/28AWG Connector: ACES 50280 Adhesive: 3M 9888T+black PE; φ10*0.5 with ears</p>	 <p>Lead wire: UL3302/28AWG Connector: Molex 51021 Adhesive: 3M 9888T+black PE; φ10*0.5 with ears</p>
CR1616/1HT55	CR1620/1ST85	CR2016/1ST55
 <p>Lead wire: UL3302/28AWG Connector: JST SHR-02V-S-B Adhesive: 3M 9888T+black PE; φ12*0.5 with ears</p>	 <p>Lead wire: UL3302/28AWG Connector: Molex 51021 Adhesive: 3M 9888T+black PE; φ15*0.5 with ears</p>	 <p>Lead wire: UL3302/28AWG Connector: Molex 51021 Adhesive: 3M 9888T+black PE; φ15*0.5 with ears</p>
CR2016W/1MT85	CR2025/1ST55	CR2025W/1MT85
 <p>Lead wire: UL3302/28AWG Connector: ACES 50285 Adhesive: 3M 9888T+black PE; φ15*0.5 with ears</p>	 <p>Lead wire: UL3302/28AWG Connector: Molex 51021 Adhesive: 3M 9888T+black PE; φ15*0.5 with ears</p>	 <p>Lead wire: UL3302/28AWG Connector: ACES 50285 Adhesive: 3M 9888T+black PE; φ15*0.5 with ears</p>

* The following configuration types can be customized according to customer needs with corresponding pin type/pin pitch and different terminal types.

Note: Design and specifications are subject to change without prior notice.

It is recommended that you obtain technical specifications from CDA to ensure that the component is suitable for your use.

DAT NO.: CDA2505S1P

Dimensions with terminals and wire connector (Unit: mm)

CR2025/1CST4	
<p> 60 ± 5 40 ± 5 Ø15 ± 0.1 28Max PIN(1) 黑 (-) PIN(2) 白 (-) PIN(3) 紅 (+) </p> <p> 3.2 ± 0.3 BLACK (-) / White (-) RED (+) </p> <p> Lead wire: UL3302/28AWG Connector: Molex 051146-0300 Adhesive: 3M 9888T+black PE; φ15*0.5 with ears </p>	

* The following configuration types can be customized according to customer needs with corresponding pin type/pin pitch and different terminal types.

Dimensions with terminals and wire connector (Unit: mm)






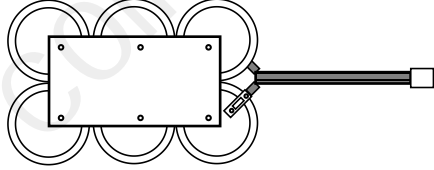
CR2032W/1SFT55	CR2032/1BT55	CR2032W/1MT85
<p>Lead wire: UL3302/28AWG Connector: Molex 51021 Adhesive: 3M 9888T+black PE; φ15*0.5 with ears</p>	<p>Lead wire: UL3302/28AWG Connector: ACES 50285 Adhesive: 3M 9888T+black PE; φ15*0.15 with ears</p>	<p>Lead wire: UL3302/28AWG Connector: ACES 50285 Adhesive: 3M 9888T+black PE; φ15*0.5 with ears</p>
CR2032W/1HT85	CR2032W/1SFT100	CR2023/1ST55
<p>Lead wire: UL3302/28AWG Connector: JST SH1.0mm-2P Adhesive: 3M 9888T+black PE; φ15*0.15 with ears</p>	<p>Lead wire: UL3302/28AWG Connector: Molex 51021 Adhesive: 3M 9888T+black PE; φ15*0.5 with ears</p>	<p>Lead wire: UL1571/28AWG Connector: Molex 51021 Adhesive: 3M 4950T+black PE; φ15*1.1 with ears</p>
CR2023/1ST85	CR2450/1ST55	CR2450/1SFT55
<p>Lead wire: UL3302/28AWG Connector: Molex 51021 Adhesive: 3M 9888T+black PE; φ15*0.5 with ears</p>	<p>Lead wire: UL3302/28AWG Connector: JST ZHR-2 Adhesive: 3M 9888T+black PE; φ19*0.5 with ears</p>	<p>Lead wire: UL3302/28AWG Connector: Molex 51021 Adhesive: 3M 9888T+black PE; φ19*0.5 with ears</p>

* The following configuration types can be customized according to customer needs with corresponding pin type/pin pitch and different terminal types.

Note: Design and specifications are subject to change without prior notice.

It is recommended that you obtain technical specifications from CDA to ensure that the component is suitable for your use.

Dimensions with terminals and wire connector (Unit: mm)

Button Battery (2 cells in parallel)	Button Battery (3 cells in parallel)	Button Battery (4 cells in parallel)
 <p>Lead wire: UL3302/28AWG Connector: Molex 51021 / JST SH1.0mm-2P Cable length: 60mm</p>	 <p>Lead wire: UL3302/28AWG Connector: Molex 51021 / JST SH1.0mm-2P Cable length: 60mm</p>	 <p>Lead wire: UL3302/28AWG Connector: Molex 51021 / JST SH1.0mm-2P Cable length: 60mm</p>
Button Battery (6 cells in parallel)	Button Battery (4 cells in parallel)	Button Battery (6 cells in parallel)
 <p>Lead wire: UL3302/28AWG Connector: Molex 51021 / JST SH1.0mm-2P Cable length: 60mm</p>	 <p>Lead wire: UL3302/28AWG Connector: Molex 51021 / JST SH1.0mm-2P Cable length: 60mm</p>	 <p>Lead wire: UL3302/28AWG Connector: Molex 51021 / JST SH1.0mm-2P Cable length: 60mm</p>

* The following configuration types can be customized according to customer needs with corresponding pin type/pin pitch and different terminal types.