



# Electrical Characteristics Data (Updating)

## (CHMV Series)

### ●1500 Hours durability characteristics (65°C 3.9V)

CHMV-3R9L474R-TW 3.9V 0.47F/18x9x16



Testing method: Place the product in a 65°C oven, apply 3.9 V, and periodically test its performance after removal.

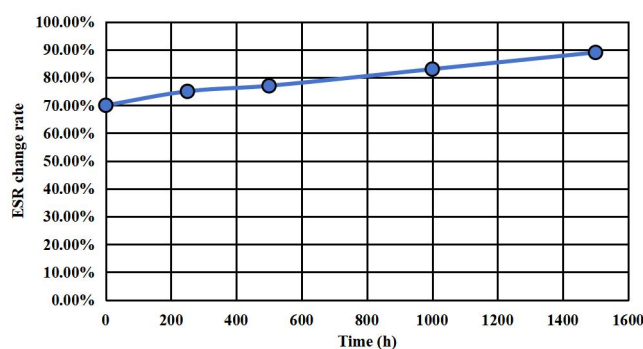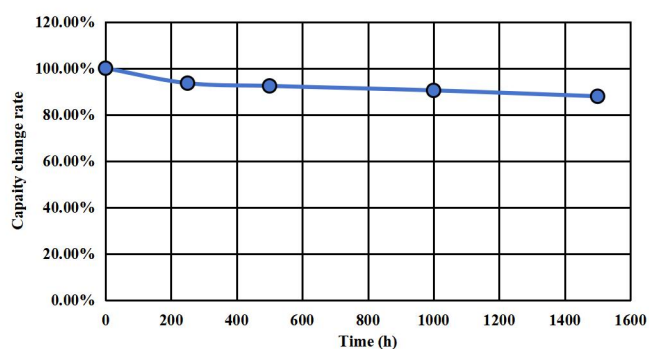

### ●500-Hour Humidity and Heat Stability (Temperature 40°C, humidity 95%)

CHMV-3R9L474R-TW 3.9V 0.47F/18x9x16



Place the product in a 40°C/95%RH constant temperature and humidity chamber for storage, and periodically remove it for performance testing.

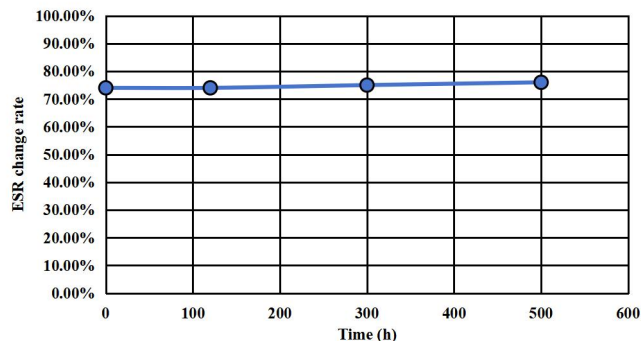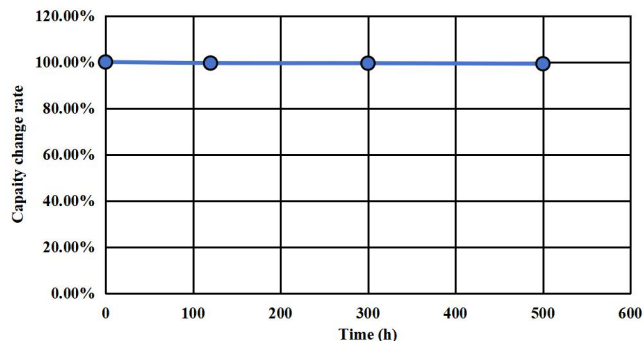

### ●1500-Hour High-Temperature Storage Characteristics (85°C)

CHMV-3R9L474R-TW 3.9V 0.47F/18x9x16

Place the product in a 85°C constant convection oven without applying voltage, and periodically remove it for performance testing.

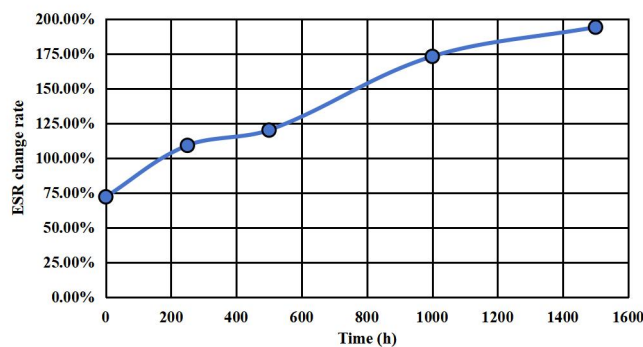
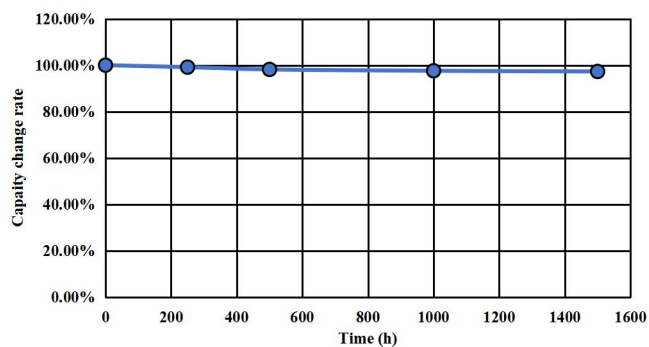


Note: If there are changes to the test data, we regret to inform you that no separate notification will be provided. We recommend obtaining technical specifications from CDA to ensure the component suits your needs.

## ●High-Low Temperature Characteristics (-45 ~ +85°C)

CHMV-3R9L474R-TW 3.9V 0.47F/18x9x16

Subject the product to a high-low temperature chamber, stabilize for 1 hour, and then perform performance testing.

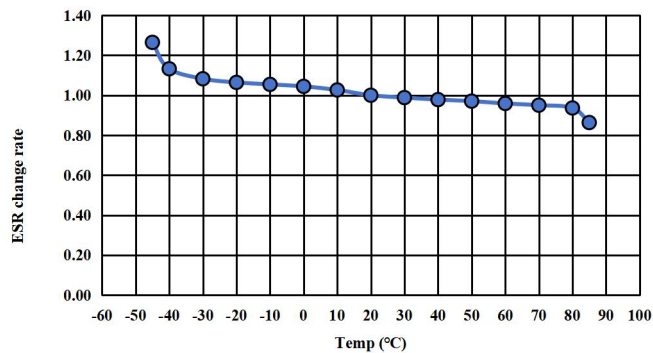
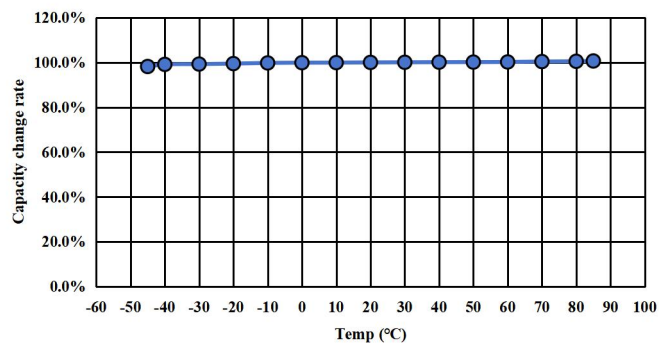


\*The above data is for reference. If the model parameters you require are not available, please contact CDA.

**●1500 Hours durability characteristics (65°C 3.9V)**



CHMV-3R9L255R-TW 3.9V 2.5F/23x12x25

Testing method: Place the product in a 65°C oven, apply 3.9 V, and periodically test its performance after removal.

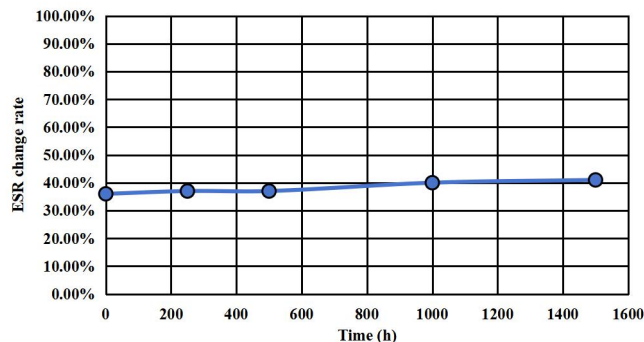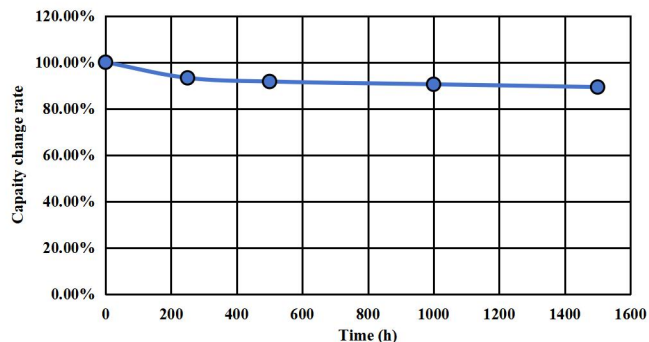**●500-Hour Humidity and Heat Stability (Temperature 40°C, humidity 95%)**



CHMV-3R9L255R-TW 3.9V 2.5F/23x12x25

Place the product in a 40°C/95%RH constant temperature and humidity chamber for storage, and periodically remove it for performance testing.

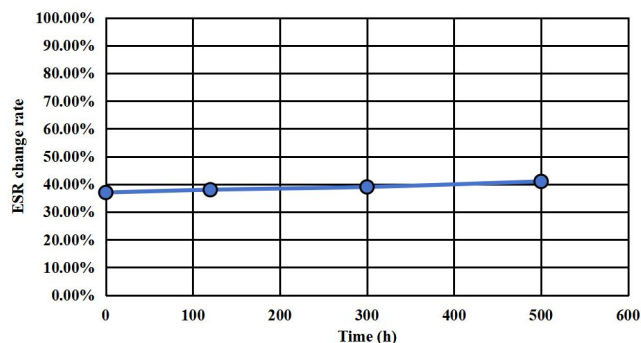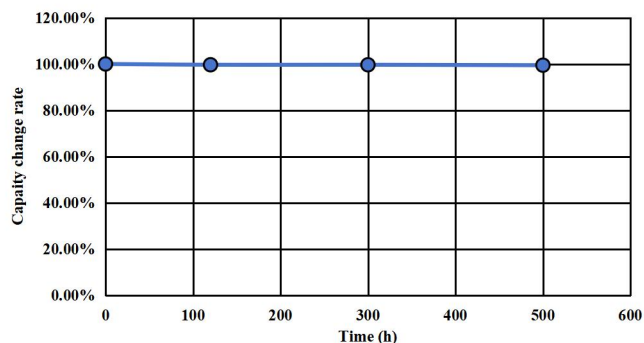**●1500-Hour High-Temperature Storage Characteristics (85°C)**

CHMV-3R9L255R-TW 3.9V 2.5F/23x12x25



Place the product in a 85°C constant convection oven without applying voltage, and periodically remove it for performance testing.

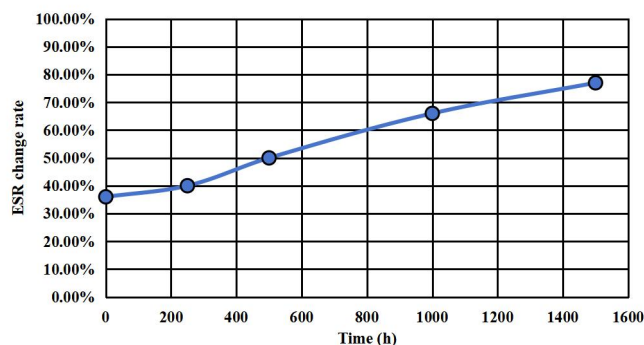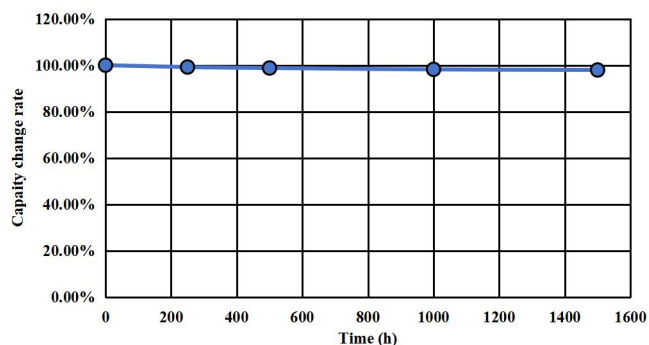

**●High-Low Temperature Characteristics (-45~+85°C)**

CHMV-3R9L255R-TW 3.9V 2.5F/23x12x25

Subject the product to a high-low temperature chamber, stabilize for 1 hour, and then perform performance testing.

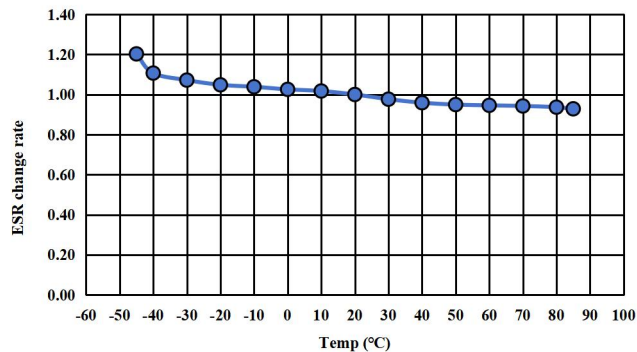
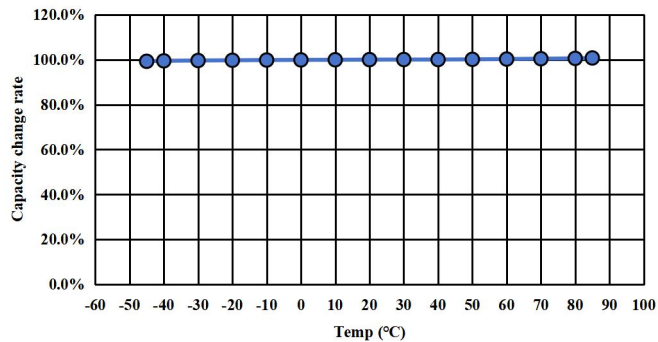


\*The above data is for reference. If the model parameters you require are not available, please contact CDA.

●1500 Hours durability characteristics (65°C 3.9V)

CHMV-3R9L505R-TW 3.9V 5F/23x12x25



Testing method: Place the product in a 65°C oven, apply 3.9 V, and periodically test its performance after removal.

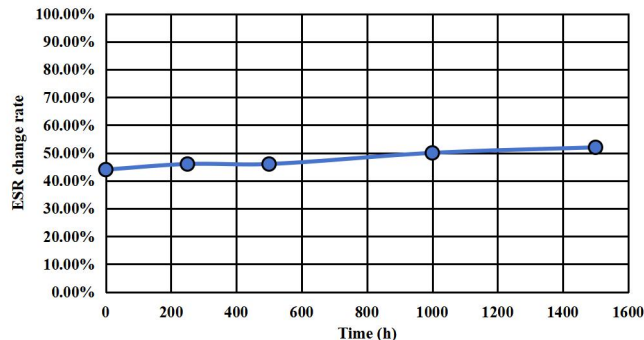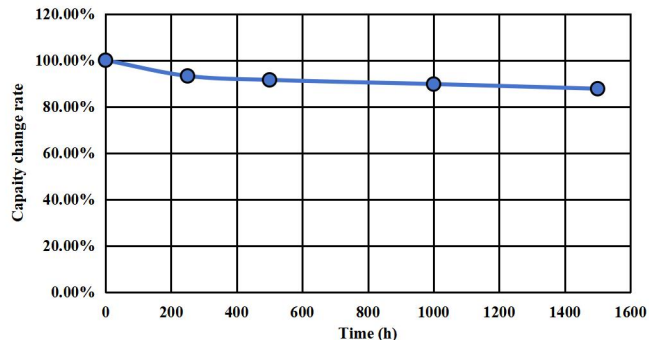

●500-Hour Humidity and Heat Stability (Temperature 40°C, humidity 95%)

CHMV-3R9L505R-TW 3.9V 5F/23x12x25



Place the product in a 40°C/95%RH constant temperature and humidity chamber for storage, and periodically remove it for performance testing.

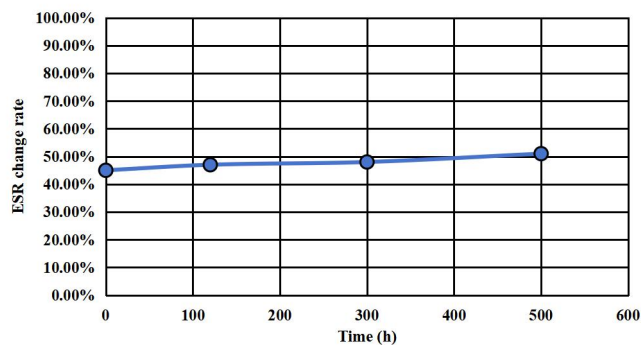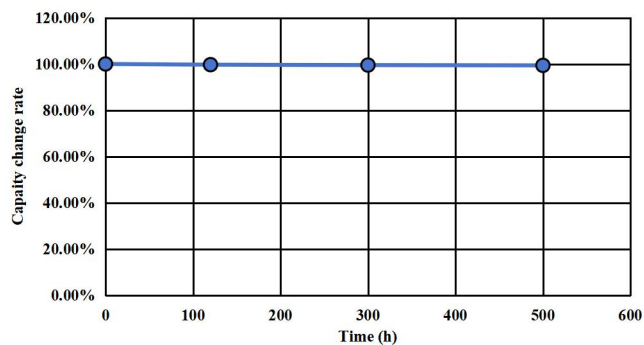

●1500-Hour High-Temperature Storage Characteristics (85°C)

CHMV-3R9L505R-TW 3.9V 5F/23x12x25



Place the product in a 85°C constant convection oven without applying voltage, and periodically remove it for performance testing.

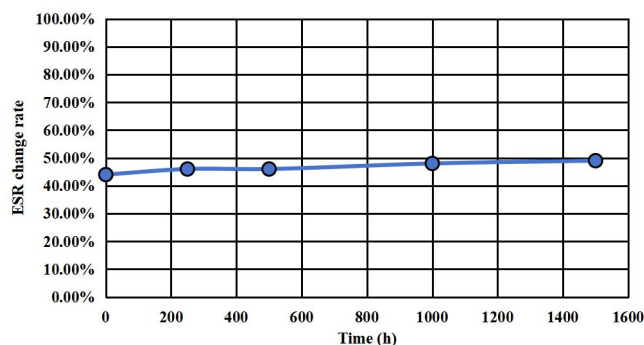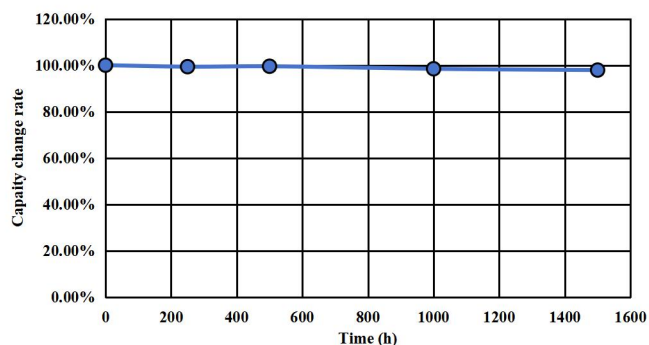

**●High-Low Temperature Characteristics (-45~+85°C)**

CHMV-3R9L505R-TW 3.9V 5F/23x12x25

Subject the product to a high-low temperature chamber, stabilize for 1 hour, and then perform performance testing.

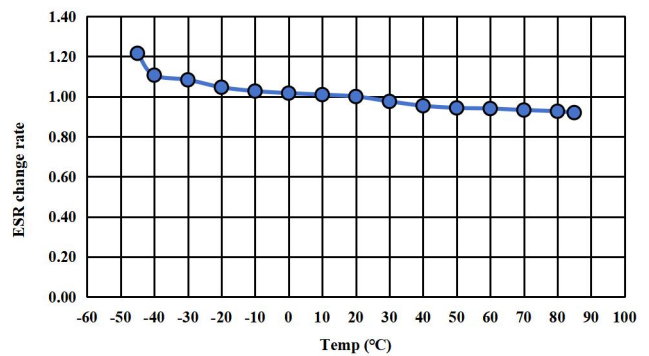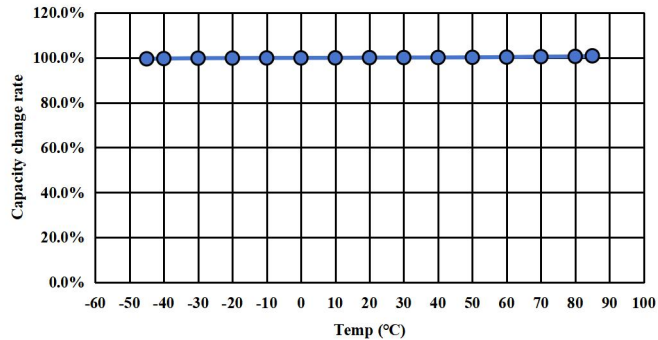

\*The above data is for reference. If the model parameters you require are not available, please contact CDA.