



# Electrical Characteristics Data

## (CZP Series)

### ●1500- Hours durability characteristics (65°C 7.5V)

CZP-7R5L334R-TW 7.5V 0.33F/24x8x14



Testing method: Place the product in a 65°C oven, apply 7.5 V, and periodically test its performance after removal.

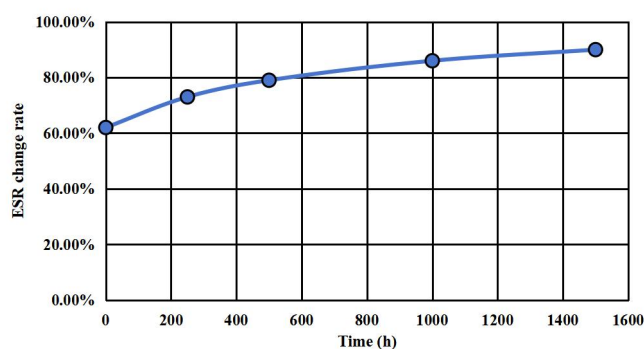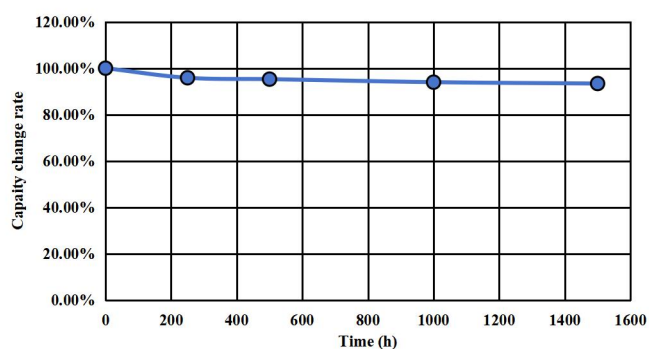

### ●500-Hour Humidity and Heat Stability (Temperature 40°C, humidity 95%)

CZP-7R5L334R-TW 7.5V 0.33F/24x8x14



Place the product in a 40°C/95%RH constant temperature and humidity chamber for storage, and periodically remove it for performance testing.

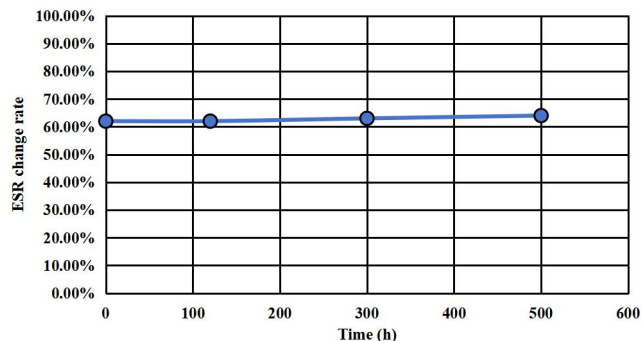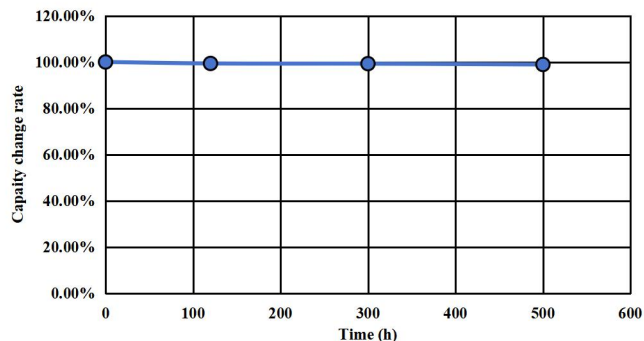

### ●1500-Hour High-Temperature Storage Characteristics (65°C)

CZP-7R5L334R-TW 7.5V 0.33F/24x8x14

Place the product in a 65°C constant convection oven without applying voltage, and periodically remove it for performance testing.

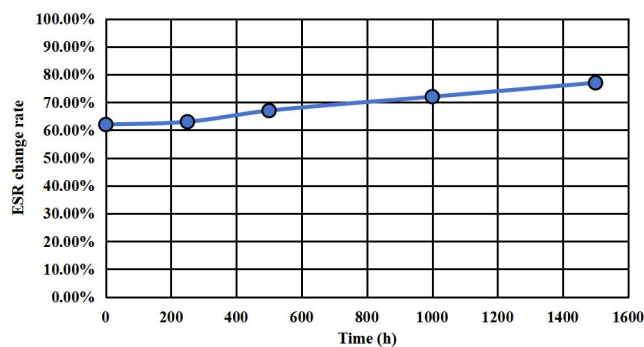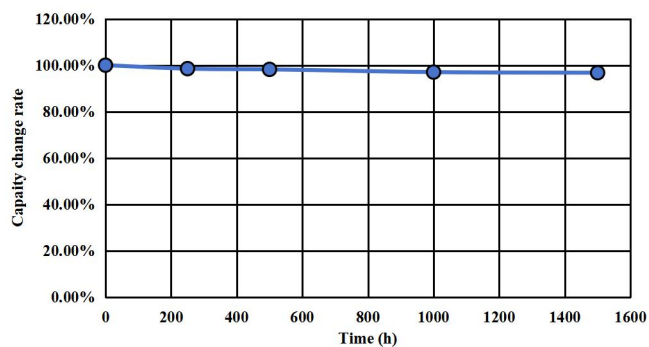



Note: If there are changes to the test data, we regret to inform you that no separate notification will be provided. We recommend obtaining technical specifications from CDA to ensure the component suits your needs.

DAT NO.: CDA2541S5P

**●High-Low Temperature Characteristics (-45 ~ +70°C)**

CZP-7R5L334R-TW 7.5V 0.33F/24x8x14

Subject the product to a high-low temperature chamber, stabilize for 1 hour, and then perform performance testing.

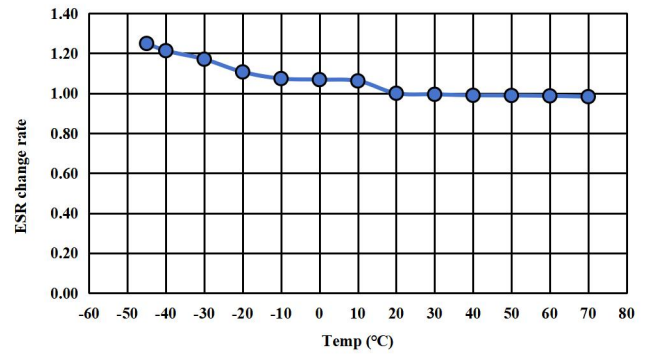
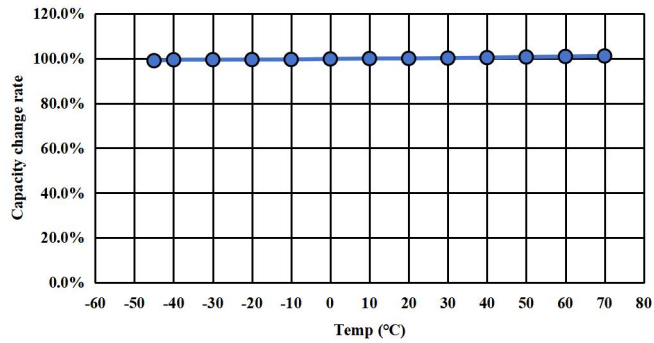


\*The above data is for reference. If the model parameters you require are not available, please contact CDA.

●1500- Hours durability characteristics (65°C 7.5V)

CZP-7R5L335R-TW 7.5V 3.3F/32x11x31



Testing method: Place the product in a 65°C oven, apply 7.5 V, and periodically test its performance after removal.

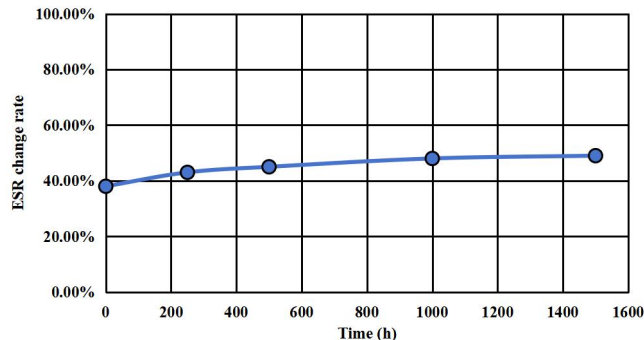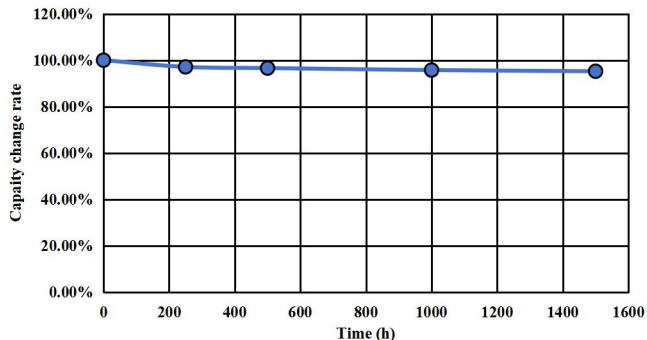

●500-Hour Humidity and Heat Stability (Temperature 40°C, humidity 95%)

CZP-7R5L335R-TW 7.5V 3.3F/32x11x31



Place the product in a 40°C/95%RH constant temperature and humidity chamber for storage, and periodically remove it for performance testing.

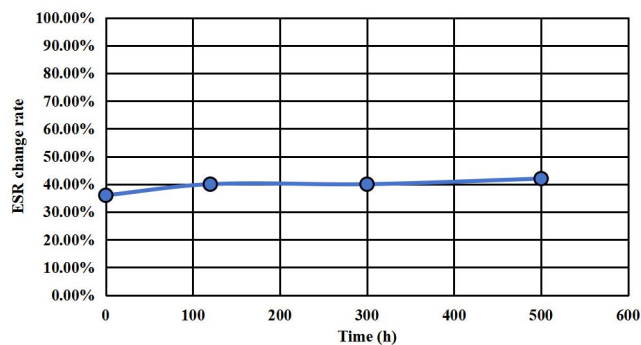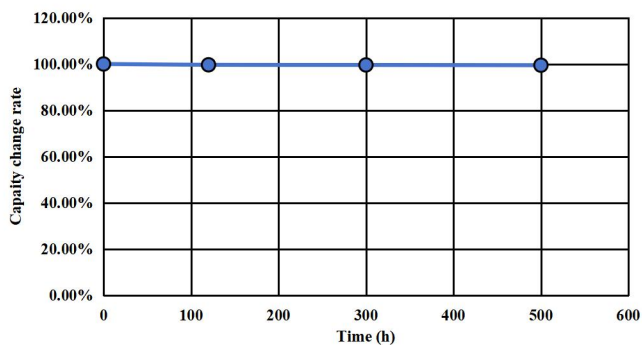

●1500-Hour High-Temperature Storage Characteristics (65°C)

CZP-7R5L335R-TW 7.5V 3.3F/32x11x31



Place the product in a 65°C constant convection oven without applying voltage, and periodically remove it for performance testing.

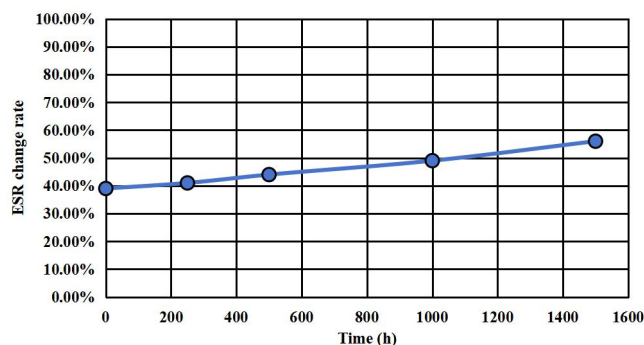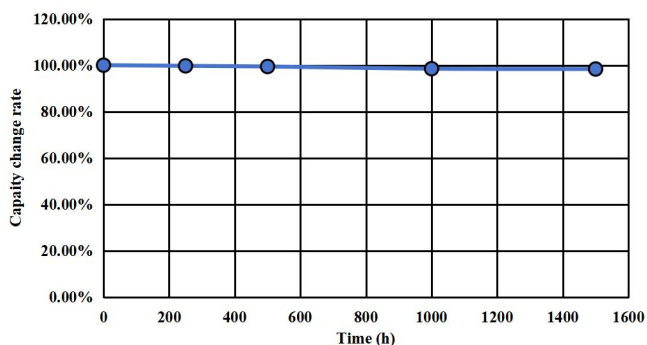

**●High-Low Temperature Characteristics (-45~+70°C)**

CZP-7R5L335R-TW 7.5V 3.3F/32x11x31

Subject the product to a high-low temperature chamber, stabilize for 1 hour, and then perform performance testing.

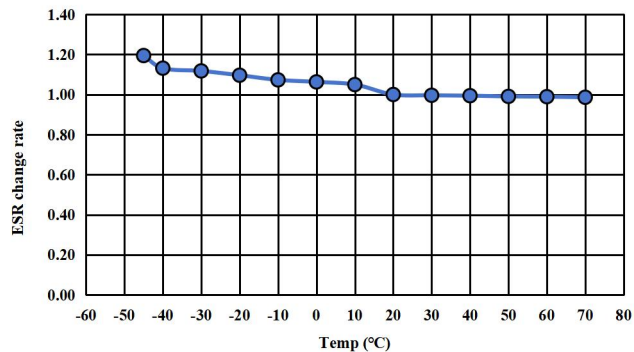
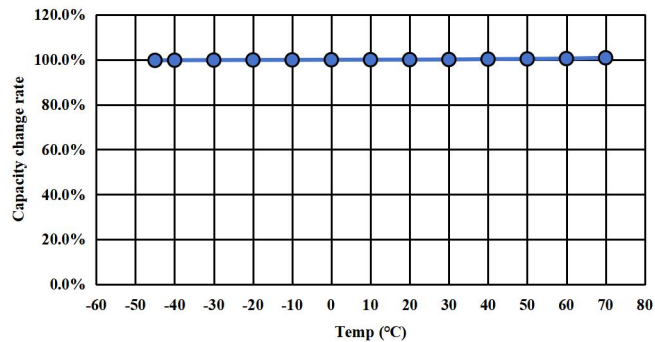


\*The above data is for reference. If the model parameters you require are not available, please contact CDA.

●1500- Hours durability characteristics (65°C 8.1V)

CZP-8R1L334R-TW 8.1V 0.33F/24x8x14



Testing method: Place the product in a 65°C oven, apply 8.1 V, and periodically test its performance after removal.

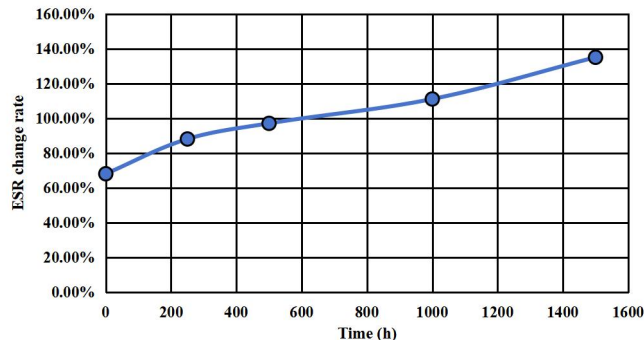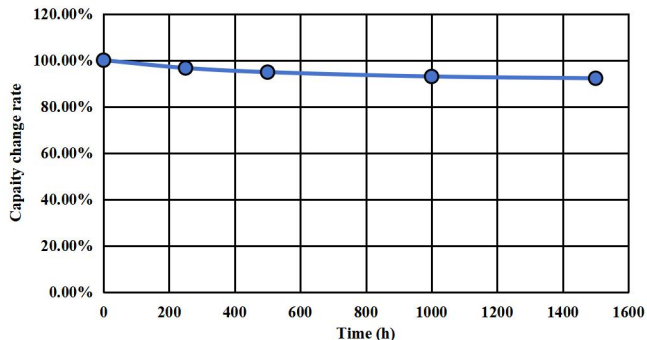

●500-Hour Humidity and Heat Stability (Temperature 40°C, humidity 95%)

CZP-8R1L334R-TW 8.1V 0.33F/24x8x14



Place the product in a 40°C/95%RH constant temperature and humidity chamber for storage, and periodically remove it for performance testing.

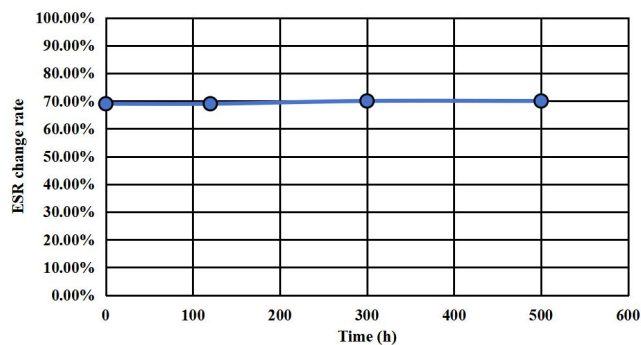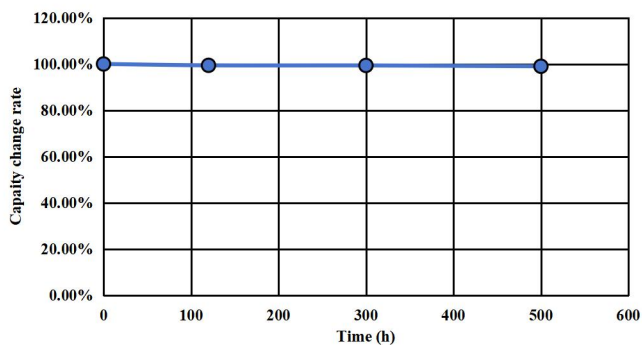

●1500-Hour High-Temperature Storage Characteristics (65°C)

CZP-8R1L334R-TW 8.1V 0.33F/24x8x14



Place the product in a 65°C constant convection oven without applying voltage, and periodically remove it for performance testing.

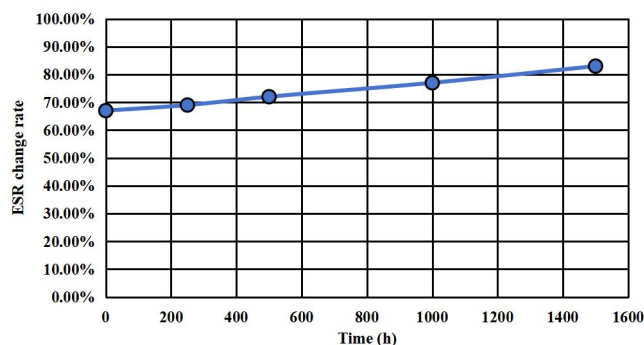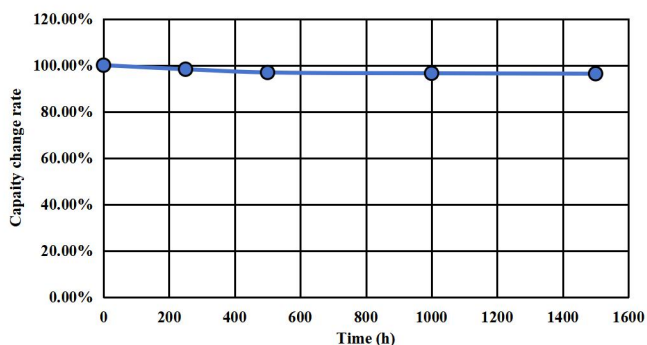

**●High-Low Temperature Characteristics (-45~+70°C)**

CZP-8R1L334R-TW 8.1V 0.33F/24x8x14

Subject the product to a high-low temperature chamber, stabilize for 1 hour, and then perform performance testing.

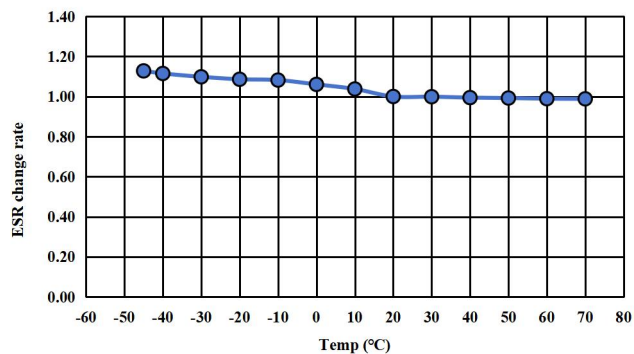
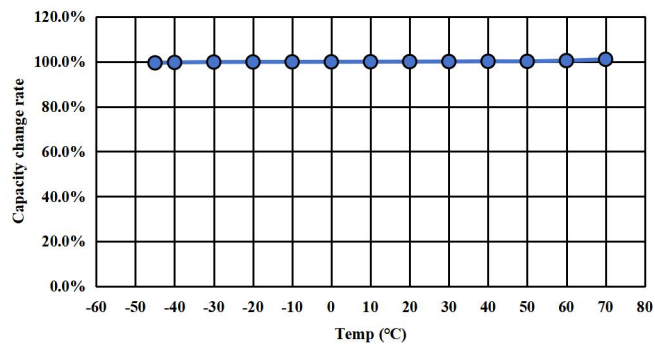


\*The above data is for reference. If the model parameters you require are not available, please contact CDA.

●1500 -Hours durability characteristics (65°C 8.1V)

CZP-8R1L604R-TW 8.1V 0.6F/24x8x18



Testing method: Place the product in a 65°C oven, apply 8.1 V, and periodically test its performance after removal.

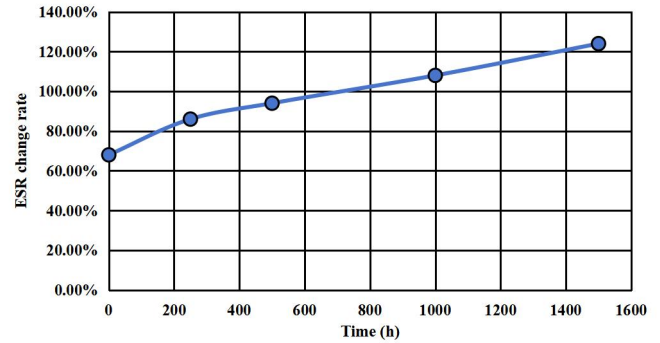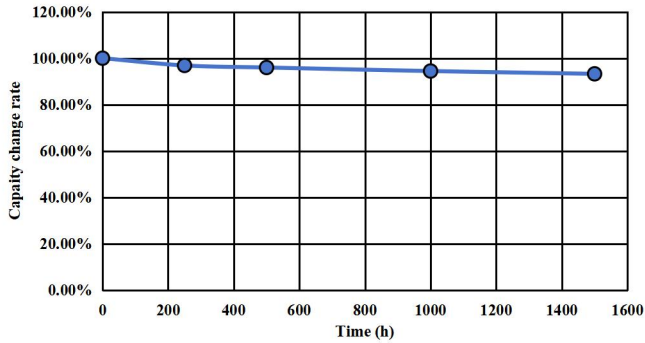

●500-Hour Humidity and Heat Stability (Temperature 40°C, humidity 95%)

CZP-8R1L604R-TW 8.1V 0.6F/24x8x18



Place the product in a 40°C/95%RH constant temperature and humidity chamber for storage, and periodically remove it for performance testing.

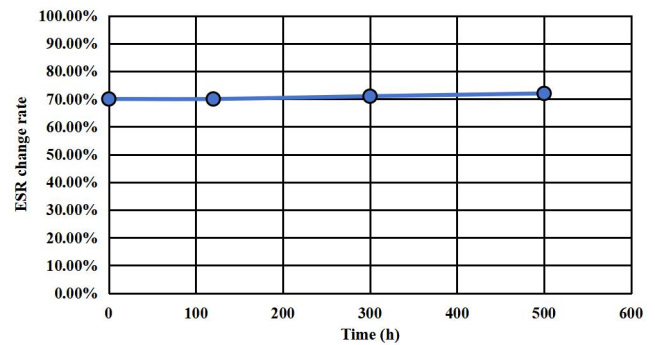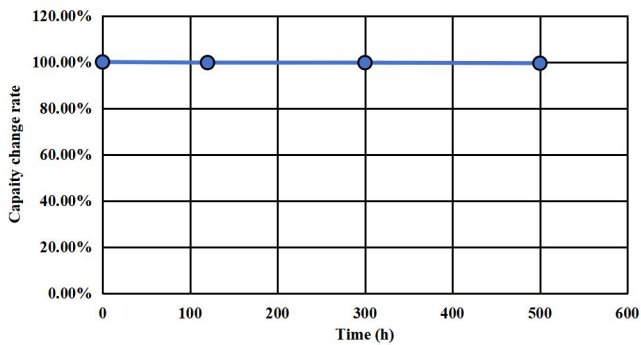

●1500-Hour High-Temperature Storage Characteristics (65°C)

CZP-8R1L604R-TW 8.1V 0.6F/24x8x18



Place the product in a 65°C constant convection oven without applying voltage, and periodically remove it for performance testing.

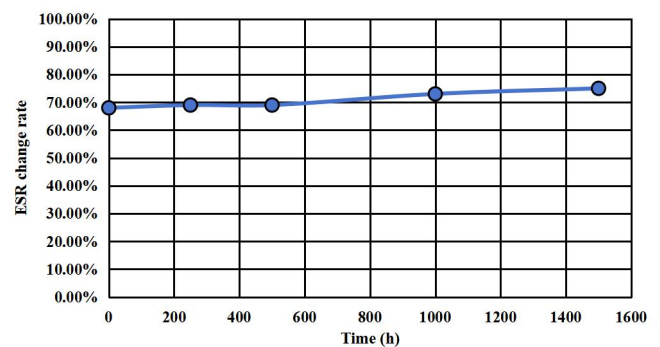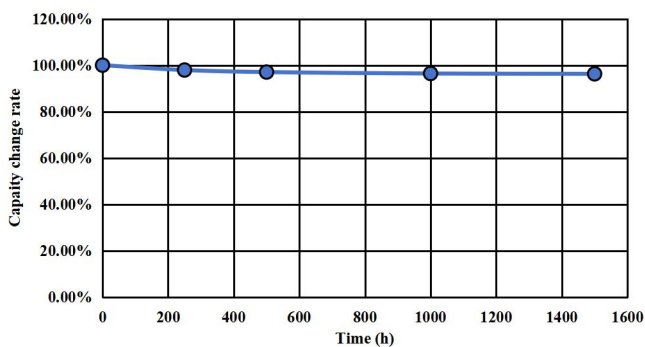

**●High-Low Temperature Characteristics (-45~+70°C)**

CZP-8R1L604R-TW 8.1V 0.6F/24x8x18

Subject the product to a high-low temperature chamber, stabilize for 1 hour, and then perform performance testing.

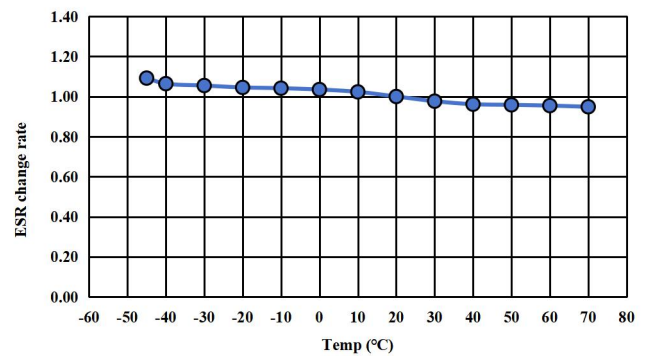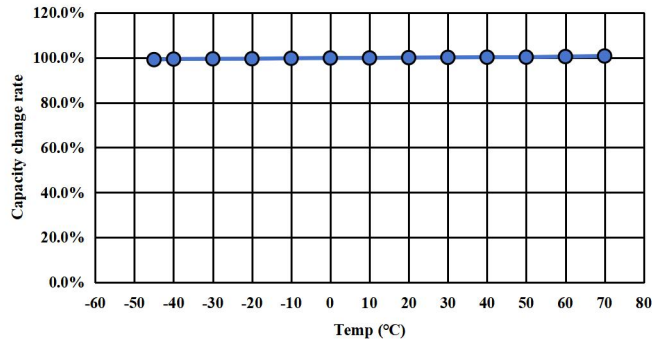



\*The above data is for reference. If the model parameters you require are not available, please contact CDA.



●1500 Hours durability characteristics (65°C 8.1V)

CZP-8R1L105R-TW 8.1V 1F/24x8x22



Testing method: Place the product in a 65°C oven, apply 8.1 V, and periodically test its performance after removal.

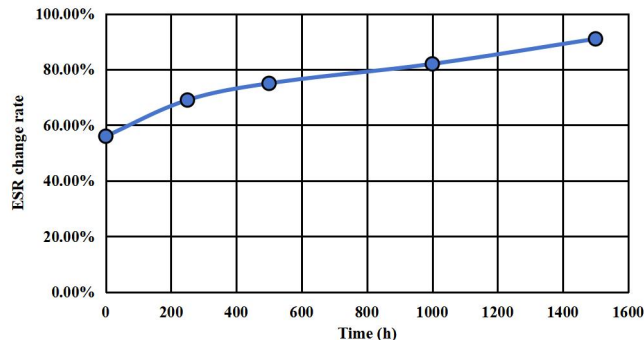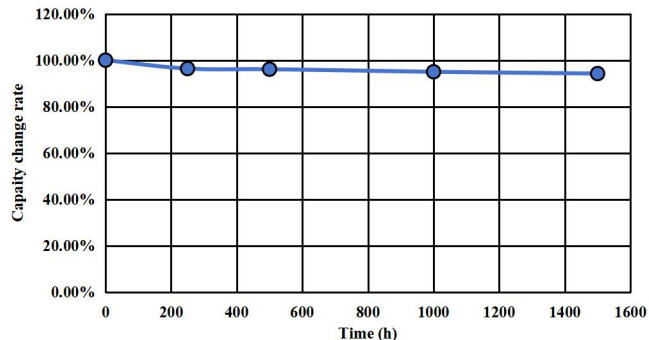

●500-Hour Humidity and Heat Stability (Temperature 40°C, humidity 95%)

CZP-8R1L105R-TW 8.1V 1F/24x8x22



Place the product in a 40°C/95%RH constant temperature and humidity chamber for storage, and periodically remove it for performance testing.

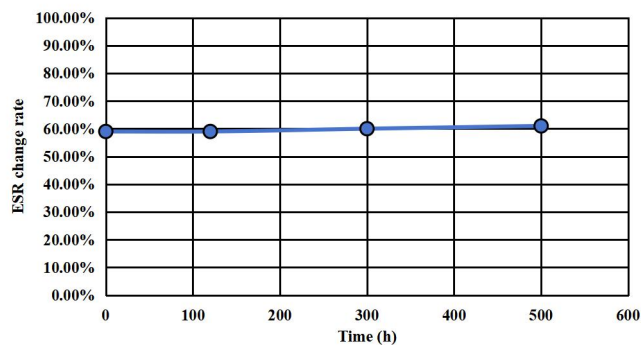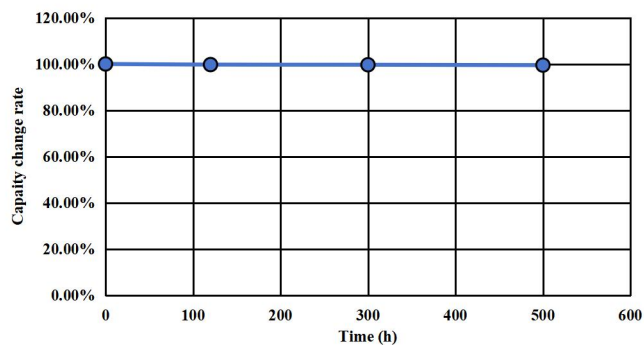

●1500-Hour High-Temperature Storage Characteristics (65°C)

CZP-8R1L105R-TW 8.1V 1F/24x8x22



Place the product in a 65°C constant convection oven without applying voltage, and periodically remove it for performance testing.

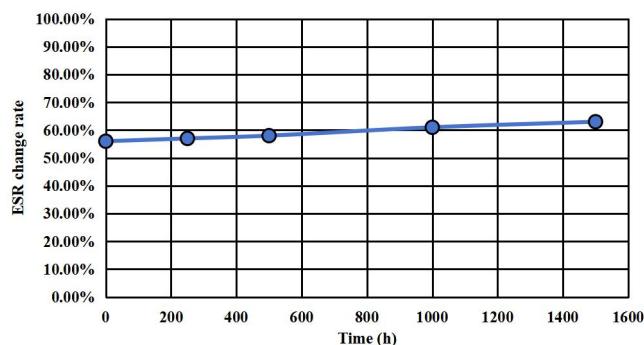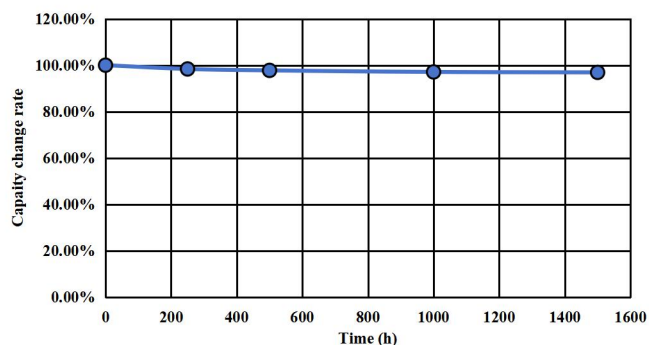

● **High-Low Temperature Characteristics (-45~+70°C)**

CZP-8R1L105R-TW 8.1V 1F/24x8x22

Subject the product to a high-low temperature chamber, stabilize for 1 hour, and then perform performance testing.

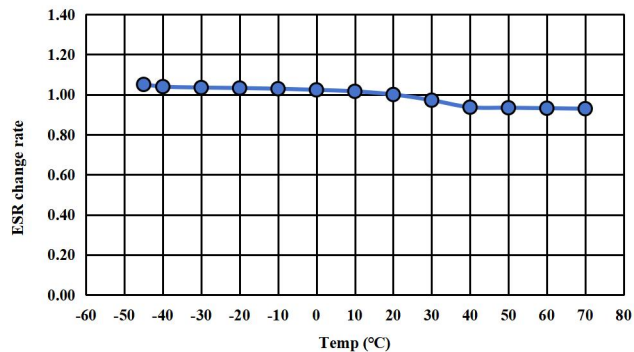
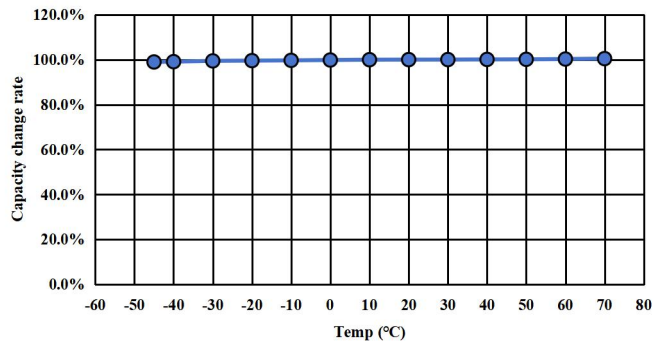


\*The above data is for reference. If the model parameters you require are not available, please contact CDA.

●1500- Hours durability characteristics (65°C 9V)

CZP-9R0L334R-TW 9V 0.33F/24x8x14



Testing method: Place the product in a 65°C oven, apply 9 V, and periodically test its performance after removal.

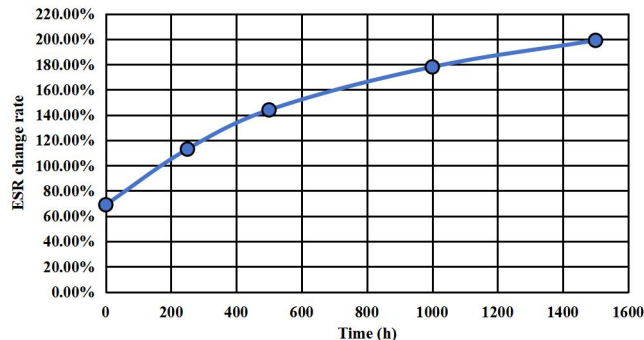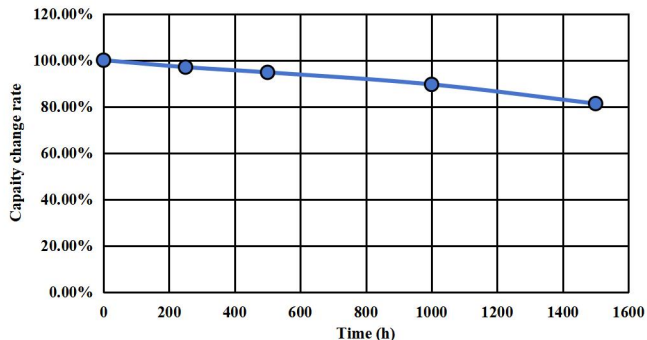

●500-Hour Humidity and Heat Stability (Temperature 40°C, humidity 95%)

CZP-9R0L334R-TW 9V 0.33F/24x8x14



Place the product in a 40°C/95%RH constant temperature and humidity chamber for storage, and periodically remove it for performance testing.

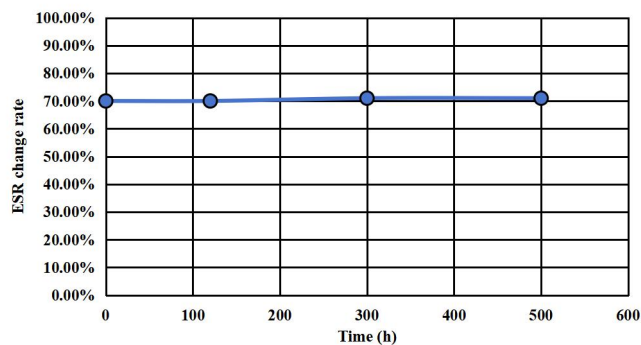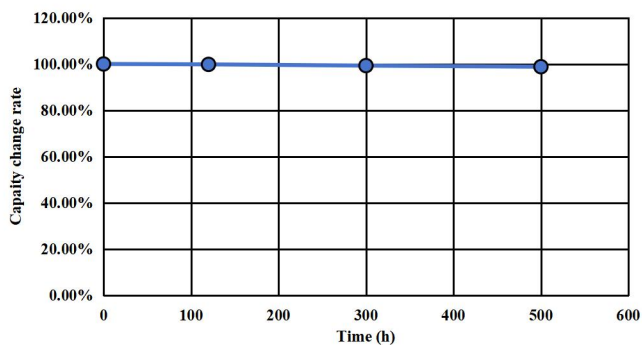

●1500-Hour High-Temperature Storage Characteristics (65°C)

CZP-9R0L334R-TW 9V 0.33F/24x8x14



Place the product in a 65°C constant convection oven without applying voltage, and periodically remove it for performance testing.

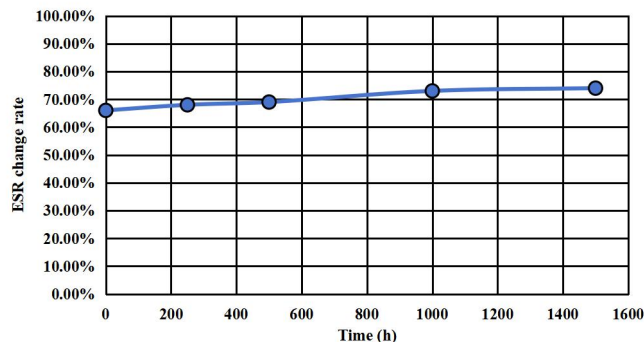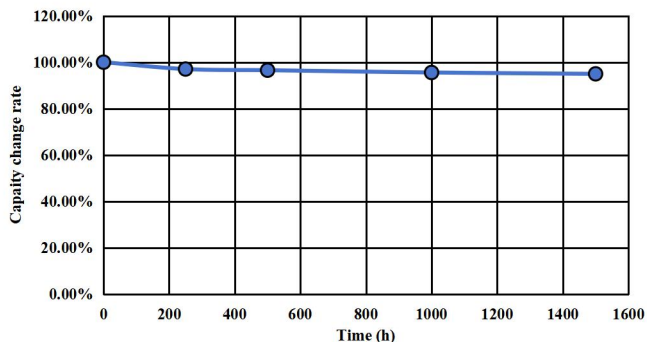

●High-Low Temperature Characteristics (-45~+70°C)

CZP-9R0L334R-TW 9V 0.33F/24x8x14

Subject the product to a high-low temperature chamber, stabilize for 1 hour, and then perform performance testing.

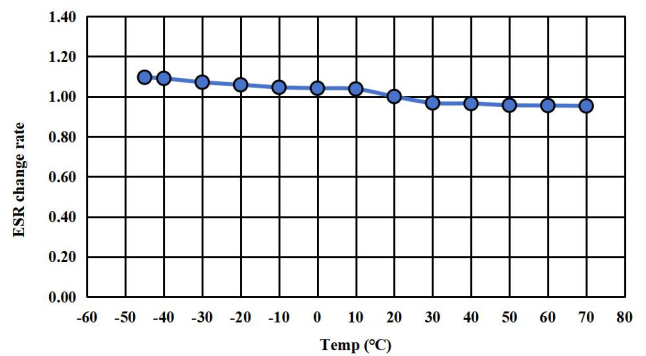
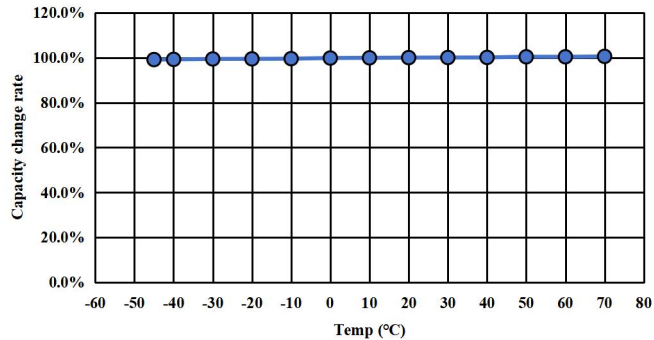


\*The above data is for reference. If the model parameters you require are not available, please contact CDA.

●1500 Hours durability characteristics (65°C 9V)

CZP-9R0L155R-TW 9V 1.5F/32x11x22



Testing method: Place the product in a 65°C oven, apply 9 V, and periodically test its performance after removal.

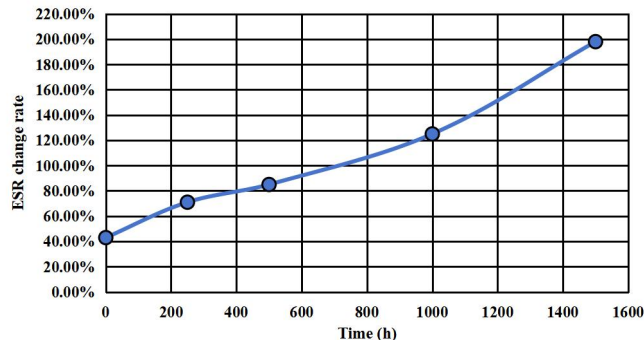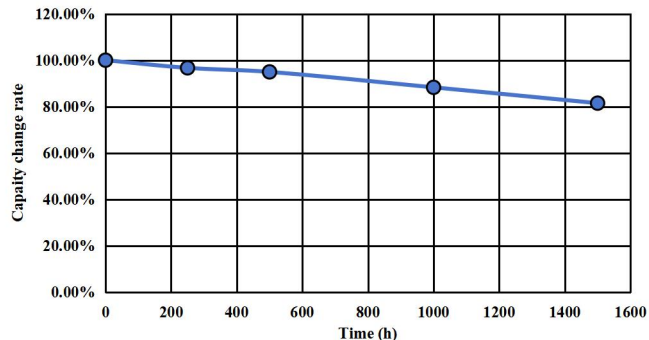

●500-Hour Humidity and Heat Stability (Temperature 40°C, humidity 95%)

CZP-9R0L155R-TW 9V 1.5F/32x11x22



Place the product in a 40°C/95%RH constant temperature and humidity chamber for storage, and periodically remove it for performance testing.

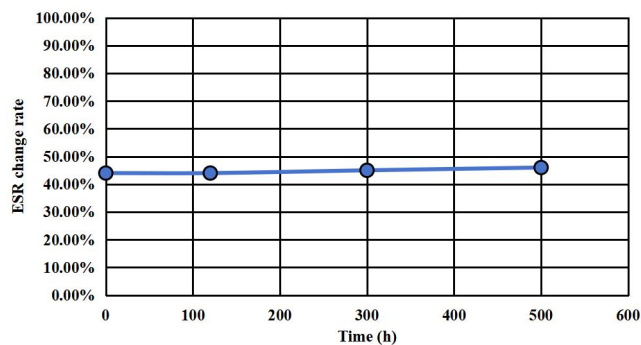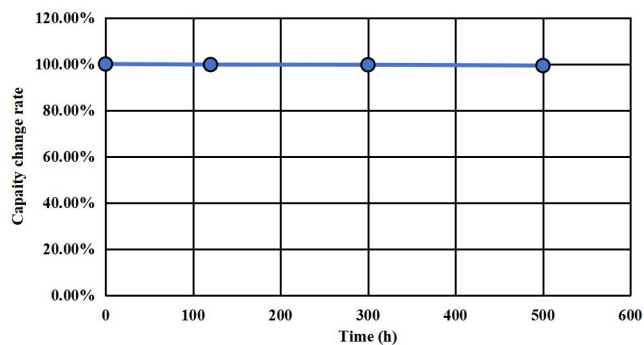

●1500-Hour High-Temperature Storage Characteristics (65°C)

CZP-9R0L155R-TW 9V 1.5F/32x11x22



Place the product in a 65°C constant convection oven without applying voltage, and periodically remove it for performance testing.

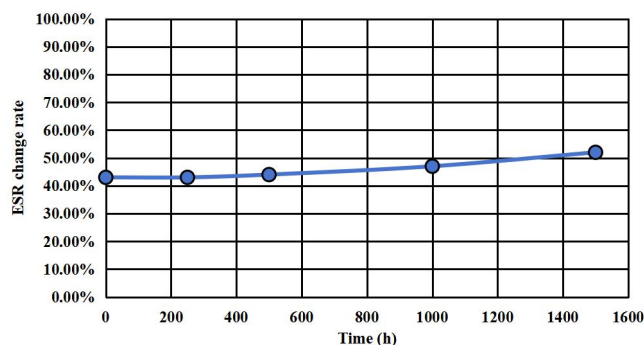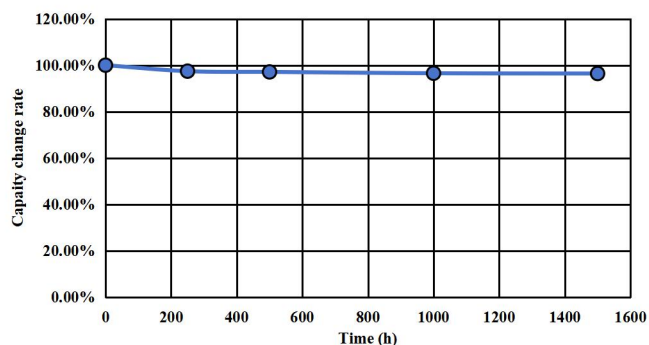

**●High-Low Temperature Characteristics (-45~+70°C)**

CZP-9R0L155R-TW 9V 1.5F/32x11x22

Subject the product to a high-low temperature chamber, stabilize for 1 hour, and then perform performance testing.

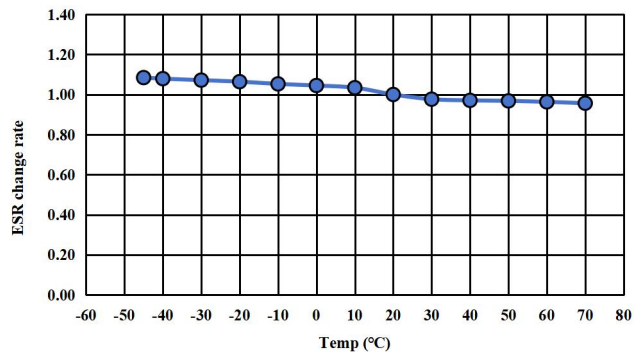
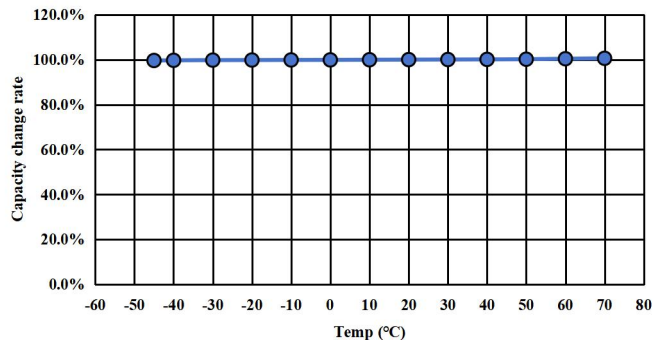


\*The above data is for reference. If the model parameters you require are not available, please contact CDA.

●1500 Hours durability characteristics (65°C 9V)

CZP-9R0L335R-TW 9V 3.3F/32x11x31



Testing method: Place the product in a 65°C oven, apply 9 V, and periodically test its performance after removal.

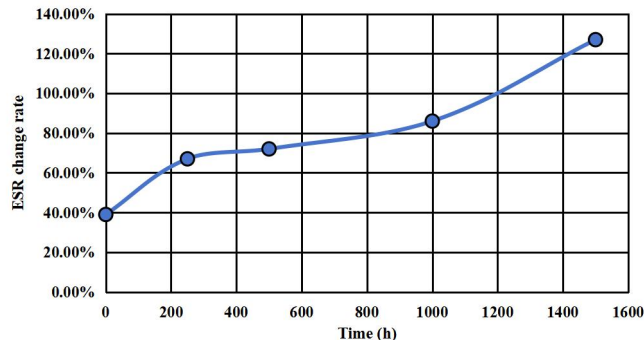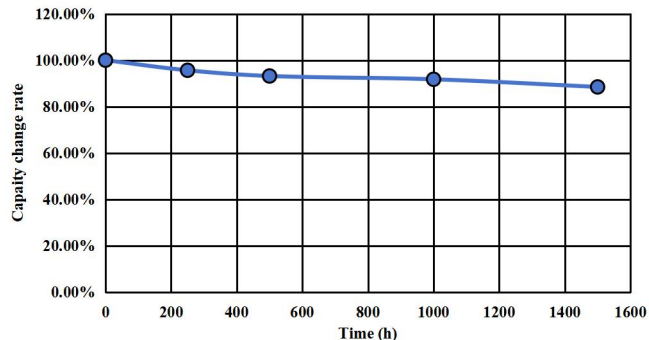

●500-Hour Humidity and Heat Stability (Temperature 40°C, humidity 95%)

CZP-9R0L335R-TW 9V 3.3F/32x11x31



Place the product in a 40°C/95%RH constant temperature and humidity chamber for storage, and periodically remove it for performance testing.

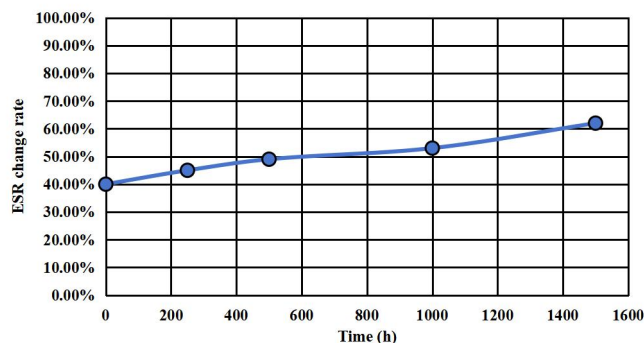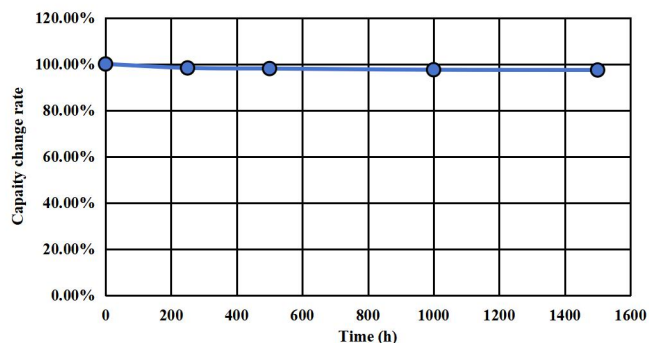

●1500-Hour High-Temperature Storage Characteristics (65°C)

CZP-9R0L335R-TW 9V 3.3F/32x11x31



Place the product in a 65°C constant convection oven without applying voltage, and periodically remove it for performance testing.

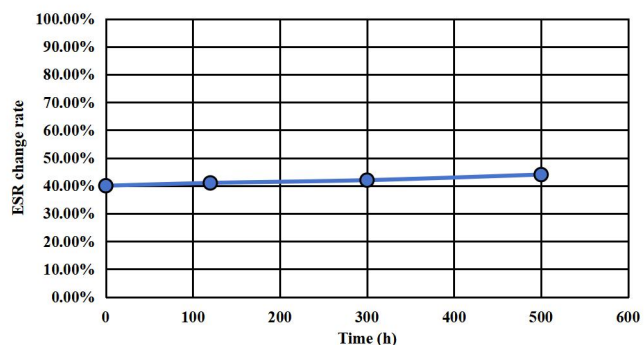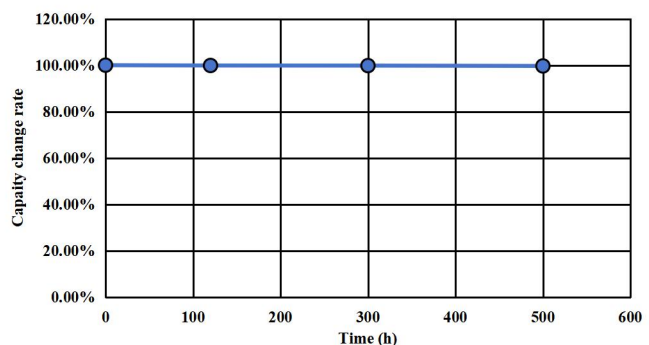

● **High-Low Temperature Characteristics (-45~+70°C)**

CZP-9R0L335R-TW 9V 3.3F/32x11x31

Subject the product to a high-low temperature chamber, stabilize for 1 hour, and then perform performance testing.

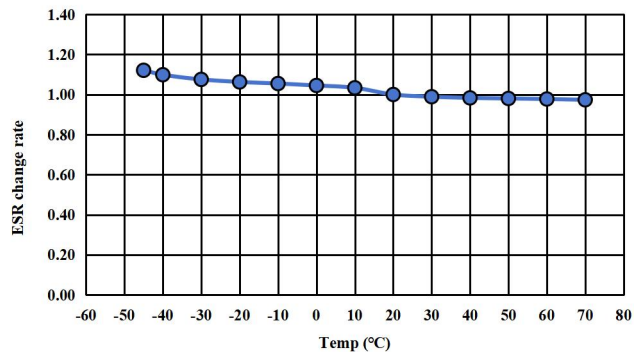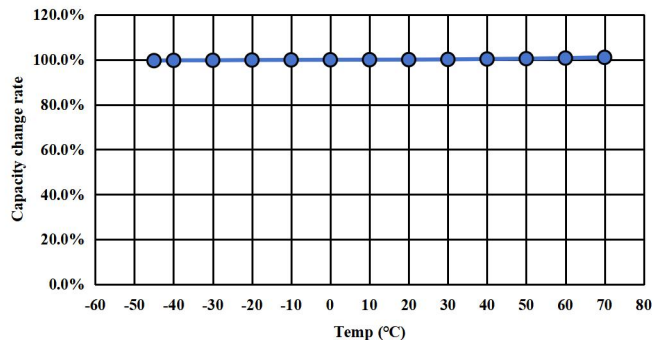

\*The above data is for reference. If the model parameters you require are not available, please contact CDA.