



FEATURES

- Low leakage current, long life, Miniaturization of $\Phi 4$, $\Phi 5$
- High power, high energy density
- Small size and low-resistance
- Long cycle life, maintenance-free
- REACH, RoHS Directive Compliant

APPLICATIONS

- Consumer electronics, GSM/GPRS Pulse applications, Backup power, Stand alone or augment existing, energy/power source.

OPERATING TEMPERATURE RANGE

- -40°C to $+70^{\circ}\text{C}$ @2.7V, 70°C for 1500 hours
- -40°C to $+85^{\circ}\text{C}$ @2.3V, 85°C for 1000 hours

GENERAL SPECIFICATIONS

Item	Performance
Operating temperature	-40°C to $+70^{\circ}\text{C}$
Capacitance range	0.1F to 120F
Rated voltage	2.7 V
Surge voltage	2.85 V
Temperature characteristics	Capacitance change: Within $\pm 30\%$ of initial measured value at $+25^{\circ}\text{C}$ Internal resistance: Within $\pm 200\%$ of initial measured value at $+25^{\circ}\text{C}$
High temperature load time	After 70°C 1500 hours : Capacitance change: $\pm 30\%$ of initial rated value Internal resistance: Within 2 times of initial specified value
Projected cycle life (From rated voltage to 1/2 rated voltage at 25°C)	After 500,000 cycles: Capacitance change: Within $\pm 30\%$ of initial rated value Internal resistance: Within 2 times of initial specified value
Humidity characteristic	Relative humidity: 90%~95% /Duration of testing: 240 hrs /Temperature: $40 \pm 2^{\circ}\text{C}$ Capacitance change: Within $\pm 30\%$ of initial rated value Internal resistance: Within 2 times of initial specified value
Vibration resistance	Amplitude: 1.5mm /Frequency: 10~55Hz /Duration: X,Y,Z(2 hrs)/Duration of testing: 6 hrs Capacitance change: Within $\pm 30\%$ of initial rated value Internal resistance: Within 2 times of initial specified value
Shelf life	After 2 years at 25°C without load, the capacitor shall meet the specified endurance limits.

PART NUMBER SYSTEM

<u>CXHP</u>	<u>2R7</u>	<u>105</u>	<u>R</u>	<u>TW</u>	<u>*</u> —	<u>***</u> —
Series	Rated Voltage	Capacity Code	Environmental Code	MFG Code	Special Code	Custom Code



Casing Display:

Series CXHP
— — — —
2.7V 15F CXHP2R7156R-TW
Cda® Super Capacitors RoHS www.cda-cap.com

DIMENSIONS




RADIAL LEAD TYPE


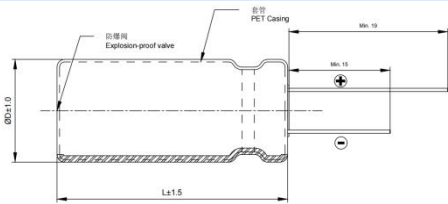


Size (mm)	ΦD	4	5	6.3	8	10	12.5	16	18
	P	1.5	2.0	2.5	3.5	5.0	5.0	7.5	7.5
	Φd	0.5	0.5	0.6	0.6	0.6	0.6/0.8	0.8	0.8


RADIAL BENT LEAD TYPE

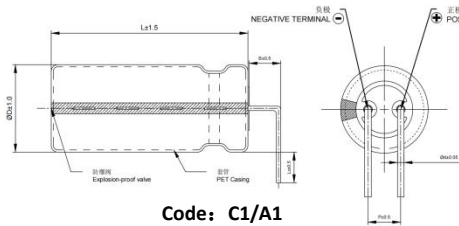

Code: C1/A1

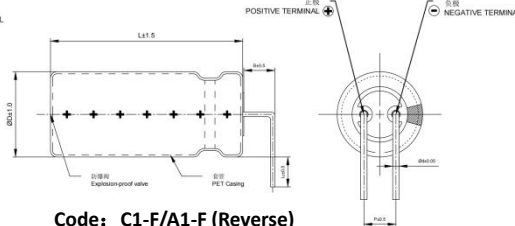



Code: C1-F/A1-F (Reverse)



Style	B(mm)
A1/A1-F	4.0
C1/C1-F	2.0

PIN CUTTING: C TYPE

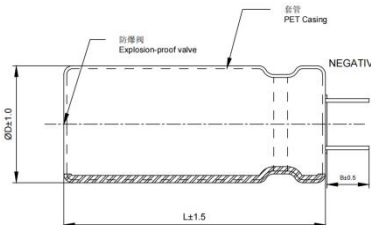

Size (mm)	ΦD	4	5	6.3	8	10	12.5	16	18
	P	1.5	2.0	2.5	3.5	5.0	5.0	7.5	7.5
	Φd	0.5	0.5	0.6	0.6	0.6	0.8	0.8	0.8
	B	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0

STANDARD PRODUCTS

Part Number	Working Voltage (V DC)	Rated Cap. (F)	Capacitance Tolerance	Dimensions (mm)		Max.ESR		Maximum Leakage (72hrs/mA)	Maximum Peak Current 1s (A)	Maximum Endurance Current 5s (A)	Power Density (W/Kg)	Maximum Energy (W.h)	Energy Density (Wh/kg)
				D	L	ESRAC (1kHz/mΩ)	ESRDC (mΩ)						
Radial Lead(Miniaturized)													
CXHP2R7154R-TW	2.7	0.15	-10%~+30%	4*	10	1000	1820	0.001	0.17	0.09	833	0.00015	0.38
CXHP2R7224R-TW	2.7	0.22	-10%~+30%	4*	10	1000	1820	0.001	0.17	0.09	833	0.0002	0.38
CXHP2R7224R-TWX	2.7	0.22	-10%~+30%	5*	10	700	1200	0.002	0.19	0.10	1135	0.0002	0.34
CXHP2R7304R-TW	2.7	0.3	-10%~+30%	4*	10	700	1200	0.002	0.19	0.11	1249	0.0003	0.38
CXHP2R7354R-TW	2.7	0.35	-10%~+30%	5*	10	600	1000	0.002	0.40	0.15	1055	0.0003	0.87
CXHP2R7504R-TWX	2.7	0.5	-10%~+30%	5*	12	600	1000	0.003	0.45	0.15	1077	0.0005	1.02
CXHP2R7504R-TW	2.7	0.5	-10%~+30%	6.3	12	240	1600	0.006	0.52	0.14	1003	0.0005	1.86
CXHP2R7604R-TW	2.7	0.6	-10%~+30%	4*	22	700	1200	0.003	0.45	0.16	1093	0.0006	1.42
CXHP2R7105R-TWV	2.7	1	-10%~+30%	4*	25	550	900	0.003	0.54	0.18	1023	0.0010	1.78
CXHP2R7105R-TWX	2.7	1	-10%~+30%	6.3	12	300	1500	0.006	0.54	0.16	1377	0.0012	1.92
CXHP2R7125R-TWX	2.7	1.2	-10%~+30%	6.3	11	200	400	0.003	0.66	0.18	3645	0.0012	1.62
CXHP2R7125R-TW	2.7	1.2	-10%~+30%	5*	22	200	400	0.006	1.16	0.33	2499	0.0012	2.17
CXHP2R7255R-TW	2.7	2.5	-10%~+30%	5*	22	200	400	0.006	1.50	0.33	2499	0.0025	3.62
CXHP2R7335R-TWX	2.7	3.3	-10%~+30%	6.3	22	90	180	0.010	2.44	0.53	3332	0.0033	3.18
CXHP2R7405R-TWV	2.7	4	-10%~+30%	6.3	25	90	130	0.010	2.44	0.53	3332	0.0040	3.18
‘*’ Please contact CDA or your agent for product characteristics data prior to purchase.													

* * Please contact CDA or your agent for product characteristics data prior to purchase.

STANDARD PRODUCTS



Part Number	Working Voltage (V DC)	Rated Cap. (F)	Capacitance Tolerance	Dimensions (mm)		Max.ESR		Maximum Leakage (72hrs/mA)	Maximum Peak Current 1s (A)	Maximum Endurance Current 5s (A)	Power Density (W/Kg)	Maximum Energy (W.h)	Energy Density (Wh/kg)
				D	L	ESRAC (1kHz/mΩ)	ESRDC (mΩ)						
Radial Lead													
CXHP2R7105R-TW	2.7	1	-20%~+50%	8	12	160	240	0.006	1.09	0.47	4050	0.0010	1.13
CXHP2R7205R-TWX	2.7	2	-20%~+50%	8	16	120	180	0.010	1.99	0.61	4459	0.0020	1.86
CXHP2R7205R-TW	2.7	2	-20%~+50%	8	12	100	280	0.010	1.73	0.49	2924	0.0020	1.90
CXHP2R7205R-TWQ	2.7	2	-20%~+50%	8	20	100	120	0.012	2.15	0.55	2924	0.0020	2.15
CXHP2R7255R-TWX	2.7	2.5	-20%~+50%	8	16	130	180	0.025	2.27	0.59	4115	0.0025	2.32
CXHP2R7305R-TWX	2.7	3	-20%~+50%	8	16	130	195	0.012	2.56	0.59	4116	0.0030	2.79
CXHP2R7305R-TW	2.7	3	-20%~+50%	8	20	100	120	0.012	2.79	0.65	4486	0.0030	2.34
CXHP2R7335R-TW	2.7	3.3	-20%~+50%	8	20	100	150	0.012	2.98	0.74	4486	0.0033	2.57
CXHP2R7405R-TW	2.7	4	-20%~+50%	10	20	70	170	0.015	3.65	0.79	2339	0.0040	2.40
CXHP2R7475R-TW	2.7	4.7	-20%~+50%	10	20	72	170	0.017	3.60	0.75	2340	0.0047	2.50
CXHP2R7505R-TWX	2.7	5	-20%~+50%	8	25	90	135	0.015	4.03	0.87	3857	0.0051	3.01
CXHP2R7505R-TWV	2.7	5	-20%~+50%	8	20	110	150	0.015	3.70	0.71	3534	0.0051	3.38
CXHP2R7505R-TWQ	2.7	5	-20%~+50%	10	16	90	135	0.020	4.03	0.80	3240	0.0051	2.53
CXHP2R7505R-TW	2.7	5	-10%~+30%	10	20	75	113	0.015	4.32	0.97	3535	0.0051	2.30
CXHP2R7605R-TW	2.7	6	-20%~+50%	10	20	75	113	0.020	5.20	0.97	3518	0.0061	2.77
CXHP2R7705R-TW	2.7	7	-20%~+50%	10	20	75	113	0.020	5.29	0.97	3535	0.0071	3.22
CXHP2R7705R-TWX	2.7	7	-20%~+50%	8	25	90	135	0.015	4.86	0.87	3600	0.0071	3.94
CXHP2R7705R-TWQ	2.7	7	-20%~+50%	8	30	60	120	0.028	6.84	1.43	3600	0.0071	4.80
CXHP2R7805R-TW	2.7	8	-20%~+50%	10	25	60	150	0.020	4.61	0.93	2303	0.0081	2.80
CXHP2R7805R-TWX	2.7	8	-20%~+50%	12.5	20	60	150	0.020	7.58	1.35	3557	0.0081	2.94
CXHP2R7106R-TWV	2.7	10	-20%~+20%	8	30	60	120	0.028	7.11	1.61	4606	0.0101	4.80
CXHP2R7106R-TW	2.7	10	-10%~+30%	10	25	65	98	0.030	6.84	1.15	3451	0.0101	3.89
CXHP2R7106R-TWQ	2.7	10	-20%~+50%	10	30	50	75	0.030	7.71	1.43	3800	0.0101	3.30
CXHP2R7106R-TWX	2.7	10	-20%~+50%	12.5	20	45	68	0.030	8.06	1.42	3757	0.0101	2.94
CXHP2R7116R-TW	2.7	11	-20%~+20%	10	30	45	68	0.030	8.06	1.51	4114	0.0110	3.21
CXHP2R7126R-TW	2.7	12	-20%~+20%	12.5	20	50	75	0.036	8.53	1.35	3381	0.0122	3.52
CXHP2R7136R-TW	2.7	13	-20%~+20%	10	25	40	90	0.020	8.60	1.27	3770	0.0132	4.54
CXHP2R7156R-TW	2.7	15	-20%~+20%	12.5	25	40	60	0.050	10.66	1.80	3359	0.0152	3.50
CXHP2R7156R-TWX	2.7	15	-20%~+20%	12.5	20	45	68	0.040	10.06	1.42	3550	0.0152	4.16
CXHP2R7186R-TW	2.7	18	-20%~+20%	12.5	25	40	60	0.055	12.27	1.66	3645	0.0183	5.06
CXHP2R7206R-TW	2.7	20	-20%~+20%	12.5	25	30	60	0.060	13.50	2.70	2692	0.0203	3.10
CXHP2R7206R-TWQ	2.7	20	-20%~+20%	12.5	30	35	53	0.055	13.17	1.93	3920	0.0203	4.76
CXHP2R7206R-TWX	2.7	20	-20%~+20%	16	20	30	60	0.056	14.21	2.05	2990	0.0203	3.12
CXHP2R7226R-TWV	2.7	22	-20%~+20%	12.5	35	30	45	0.056	11.33	1.93	3535	0.0223	3.68
CXHP2R7256R-TW	2.7	25	-20%~+20%	16	25	27	50	0.060	15.00	2.09	2419	0.0253	3.50
CXHP2R7256R-TWV	2.7	25	-20%~+20%	12.5	35	30	45	0.060	15.88	2.23	3534	0.0253	4.60
CXHP2R7306R-TW	2.7	30	-20%~+20%	16	30	20	40	0.070	18.41	2.53	2664	0.0304	3.70
CXHP2R7306R-TWX	2.7	30	-20%~+20%	16	25	25	38	0.072	19.06	2.41	3049	0.0304	3.97
CXHP2R7356R-TWX	2.7	35	-20%~+20%	16	30	22	33	0.080	21.93	2.79	3194	0.0354	4.27
CXHP2R7356R-TW	2.7	35	-20%~+20%	16	35	19	42	0.086	23.86	3.24	3220	0.0354	3.65
CXHP2R7346R-TW	2.7	34	-20%~+20%	12.5	46	20	45	0.080	23.68	3.01	3694	0.0344	5.47
CXHP2R7406R-TWX	2.7	40	-20%~+20%	12.5	46	20	45	0.080	23.68	3.01	3694	0.0405	5.47
CXHP2R7406R-TW	2.7	40	-20%~+20%	18	40	16	24	0.105	27.20	3.40	2287	0.0406	3.18
CXHP2R7476R-TW	2.7	47	-20%~+20%	18	40	16	24	0.105	29.40	3.72	2647	0.0470	3.68
CXHP2R7506R-TW	2.7	50	-20%~+20%	18	40	16	24	0.105	30.68	3.96	2848	0.0506	3.96
CXHP2R7506R-TWQ	2.7	50	-20%~+20%	12.5	50	18	35	0.105	28.72	3.40	3640	0.0506	5.69
CXHP2R7506R-TWX	2.7	50	-20%~+20%	18	35	18	27	0.110	30.92	3.52	2700	0.0506	5.06
CXHP2R7606R-TW	2.7	60	-20%~+20%	18	40	15	23	0.150	34.47	4.09	2880	0.0608	4.28
CXHP2R7706R-TW	2.7	70	-20%~+20%	18	40	15	22	0.125	36.21	4.05	3042	0.0709	5.67
CXHP2R7826R-TW	2.7	82	-20%~+20%	18	40	15	22	0.140	38.03	4.05	2817	0.0810	6.00
CXHP2R7107R-TWV	2.7	100	-20%~+20%	18	60	13	20	0.240	45.76	5.30	2136	0.1013	4.82
CXHP2R7127R-TWV	2.7	120	-20%~+20%	18	60	13	20	0.280	48.50	5.30	2039	0.1215	5.52


*operating temperature can be extended to 85°C with appropriate voltage.

No. 4, Jifeng Road, Wufeng District, Taichung City, Taiwan. TEL:+86-852-51245795 www.cda-cap.com E-MAIL: zfw@cda-cap.tw


Specifications are subject to change without notice. Should a safety or technical concern arise regarding the product, please be sure to contact our sales offices or agents immediately.

Spec. Date:2025-08-12


CAPACITANCE VS. TEMPERATURE

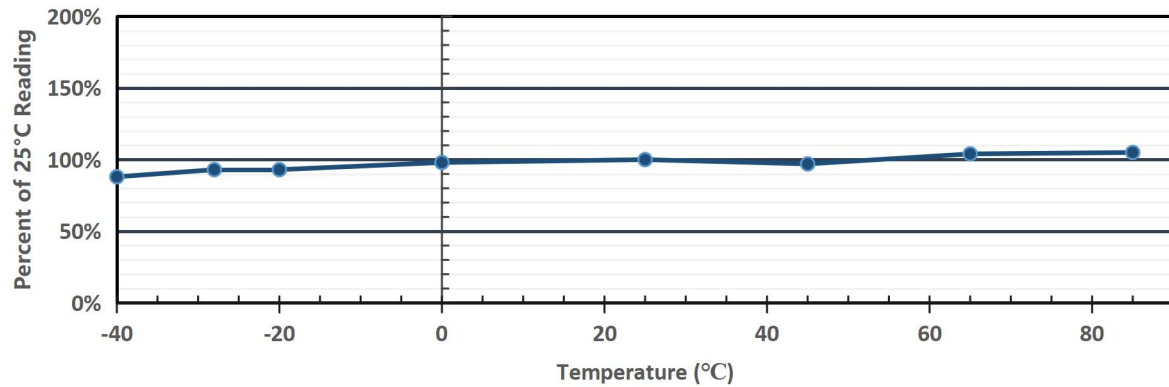

LEAKAGE CURRENT VS. TEMPERATURE

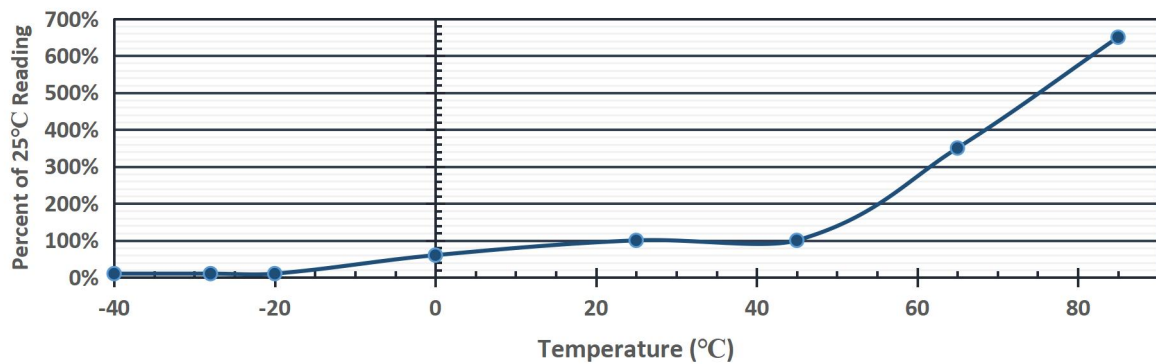

EQUIVALENT SERIES RESISTANCE VS. TEMPERATURE

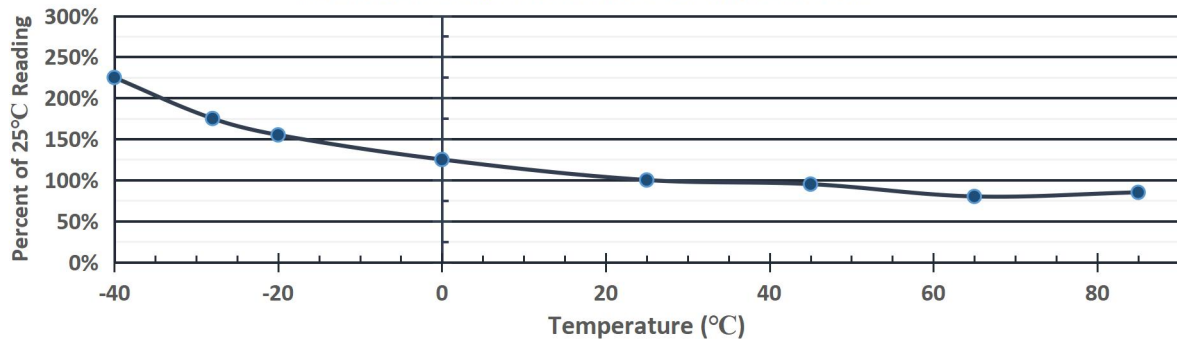

LIFE TIME AND TEMPERATURE PERFORMANCE



The life of a Super Capacitor is impacted by a combination of operating voltage and the operating temperature according to the following equation :

$$L = L_0 \times 3.25^{\frac{T_0 - T}{10}} \times 1.52^{\frac{V_0 - V}{0.1}}$$

L : is the theoretical lifetime at T temperature;


L₀ : is the working life of the highest rated working temperature;

T : is the actual working temperature;

T₀ : is the highest rated working temperature;

V : is the actual working voltage;

V₀ : is the highest rated working voltage.

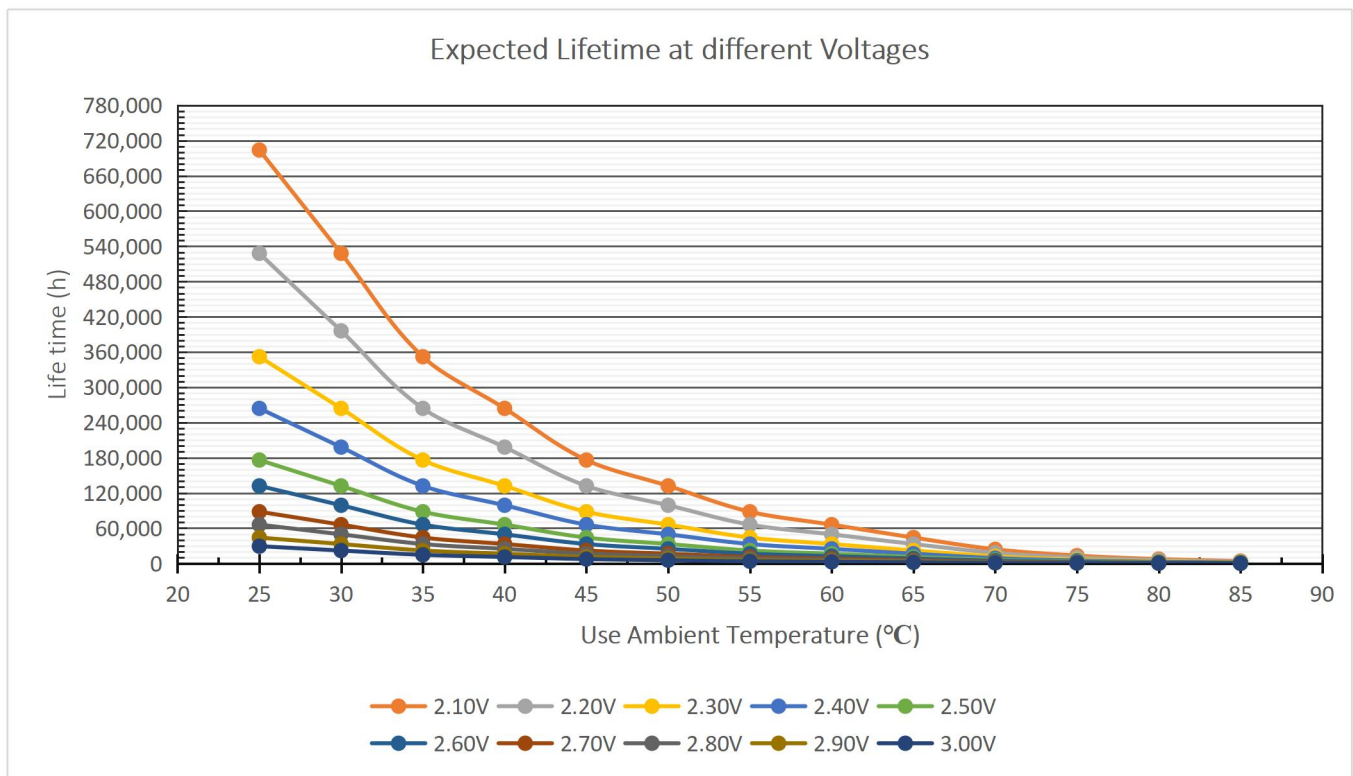

*Note : Estimated lifespan: The estimated lifespan under different operating voltages and operating temperatures in a theoretical environment. For the actual service life, please contact us to discuss the working conditions.



SAFETY RECOMMENDATIONS

WARNINGS

- To Avoid Short Circuit, after usage or test, SuperCapacitors voltage needs to discharge to $\leq 0.1V$.
- Do not Apply Over-voltage, Reverse Charge, Burn or Heat Higher than $150^{\circ}C$, explosion-proof valve may break open.
- Do not Press, Damage or disassemble the SuperCapacitor, housing could heat to high temperature causing Burns.
- If you observe Overheating or Burning Smell from the capacitor disconnect Power immediately, and do not touch.

Emergency Handling

In case of leakage from the housing:

- Skin contact: Immediately clean the contacted area thoroughly with soap and water.
- Eye contact: Rinse with running water or normal saline, and seek medical attention immediately.
- Ingestion: Immediately rinse the contacted areas (such as the mouth) with water, and seek medical attention.

Precautions for Polarity and Reverse Voltage Usage

To ensure product consistency and optimal performance, it is recommended to use the capacitor in accordance with the marked polarity. Reverse polarity may cause permanent damage to the circuit, including a significant increase in leakage current within a short period of time, and will shorten the service life of the supercapacitor.

In practical applications, it is necessary to strictly confirm the connection in accordance with the circuit design and the polarity markings on the capacitor body (such as "+" and "-" symbols, differences in pin length, etc.) to avoid the application of reverse voltage.

PRECAUTIONS FOR WELDING

When soldering supercapacitors to a PCB, the temperature & time that the body of the supercapacitor sees during soldering can have a negative effect on performance. We advise following these guidelines:

- Do not immerse the supercapacitors in solder. Only the leads should come in contact with the solder.
- Ensure that the body of the supercapacitor is never in contact with the molten solder, the PCB or other components during soldering.
- Excessive temperatures or excessive temperature cycling during soldering may cause the safety vent to burst or the case to shrink or crack, potentially damaging the PCB or other components, and significantly reduce the life of the capacitor.

HAND SOLDERING

Keep distance between the supercapacitor body and the tip of the soldering iron and the tip should never touch the body of the capacitor. Contact between supercapacitor body and soldering iron will cause extensive damage to the supercapacitor, and change its electrical properties. It is recommended that the soldering iron temperature should be less than $350^{\circ}C$, and contact time should be limited to less than 4 seconds. Too much exposure to terminal heat during soldering can cause heat to transfer to the body of the supercapacitor, potentially damaging the electrical properties of the supercapacitor.

REGULATORY

- MSDS
- RoHS Compliant
- Reach Compliant

TRANSPORTATION

Not subjected to US DOT or IATA regulations

UN3499, <10Wh, Non-Hazardous Goods

International shipping description –

"Electronic Products – Capacitor"

Storage Requirements

The storage temperature range of the capacitor is $-40^{\circ}C$ to $+70^{\circ}C$, with a relative humidity of < 60%. Lower storage temperatures are preferable, as they can extend the capacitor's shelf life. For products where the production date code indicates storage duration of more than 1 year but less than 2 years, it is recommended to perform recharge activation for at least 24 hours before initial use.

Optimal Storage Conditions

- Temperature: $25^{\circ}C$, relative humidity: $\leq 60\%$, with no voltage applied.
- Avoid direct exposure to sunlight.
- Prevent direct contact with water, salt, oil, or other chemicals.
- Prevent direct contact with corrosive substances, acids, alkalis, or toxic gases.
- Avoid storage in dusty environments.
- Avoid storage in environments with shock and vibration.

WAVE SOLDERING

Only use wave soldering on Radial type supercapacitors. The PCB should be preheated only from the bottom and for less than 60 seconds, with temperature at, or below, $100^{\circ}C$ on the top side of the board for PCBs equal to or greater than 0.8 mm thick.

Solder Temperature ($^{\circ}C$)	Suggested Solder Time (s)	Maximum Solder Time (s)
220	7	9
240	7	9
250	5	7
260	3	5

Selective wave soldering		
Solder Temperature ($^{\circ}C$)	Suggested Solder Time (s)	Maximum Solder Time (s)
290	2	4

***Caution:** For all products with PET sleeves, the use of any type of cleaning agent is prohibited for cleaning.

During all welding processes, it is recommended to protect the shrink film from contact with any liquids (including but not limited to: water, strong acids, strong alkalis, strong oxidizing solutions, and strong solvents), so as to avoid the risk of damage, cracking, and discoloration of the outer shrink film.