



FEATURES

- High power,high energy density
- Long cycle life,maintenance-free
- Lead terminals can be customized
- Low ESR, Low Leakage Current
- REACH,RoHS Directive Compliant

APPLICATIONS

- Consumer electronics, Ride thru power support, Back up power, Stand alone or augment existing, energy/power source.

OPERATING TEMPERATURE RANGE

- -40°C to +70°C @5.5V/5.0V 70°C for 2000 Hours
- -40°C to +85°C @4.6V 85°C for 1000 Hours

GENERAL SPECIFICATIONS

Item	Performance
Operating temperature	-40°C to +70°C
Capacitance range	0.047F to 60F
Rated voltage	5.0V / 5.5V
Surge voltage	5.7 V
Temperature characteristics	Capacitance change: Within $\pm 30\%$ of initial measured value at +25°C Internal resistance: Within $\pm 200\%$ of initial measured value at +25°C
High temperature load time	After 70°C 2000 hours Capacitance change: $\pm 30\%$ of initial rated value Internal resistance: Within 2 times of initial specified value
Projected cycle life (From rated voltage to 1/2 rated voltage at 25°C)	After 500,000 cycles: Capacitance change: Within $\pm 30\%$ of initial rated value Internal resistance: Within 2 times of initial specified value
Humidity characteristic	Relative humidity: 90%~95% /Duration of testing:240 hrs /Temperature:40 $\pm$ 2°C Capacitance change: Within $\pm 30\%$ of initial rated value Internal resistance: Within 2 times of initial specified value
Vibration resistance	Amplitude:1.5mm /Frequency:10~55Hz /Duration: X,Y,Z(2 hrs)/Duration of testing:6 hrs Capacitance change: Within $\pm 30\%$ of initial rated value Internal resistance: Within 2 times of initial specified value
Shelf life	After 2 years at 25°C without load, the capacitor shall meet the specified endurance limits.

PART NUMBER SYSTEM

<u>CHP</u>	<u>5R5</u>	<u>L</u>	<u>105</u>	<u>R</u>	<u>TW</u>	<u>**</u>	<u>**</u>
Series	Rated Voltage	Connection Code	Capacity Code	Environmental Code	MFG Code	Special Code	PIN Code


Casing Display:



DIMENSIONS




DA Type

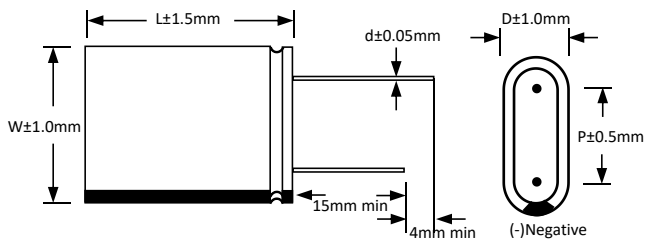


D	P(mm)	Φd
4	5.8	0.5
5	7.5	0.5
7	10.0	0.6
8	11.5	0.6
10	15.5	0.6
12.5	17.5	0.6/0.8
16	23.7	0.8
18	26.0	0.8

DB Type

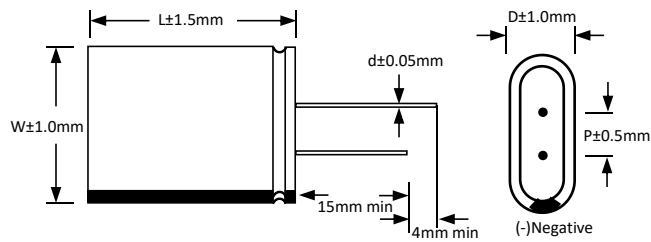


D	P(mm)	Φd
4	2.5	0.5
5	3.5	0.5
7	5.0	0.6
8	5.0	0.6
10	5.5	0.6
12.5	7.5	0.6/0.8
16	8.5	0.8
18	10.5	0.8

DC Type

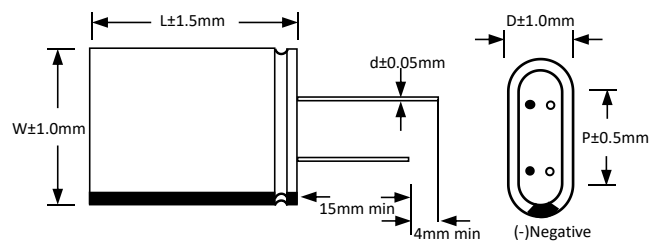

D	P(mm)	Φd
4	/	0.5
5	/	0.5
7	/	0.6
8	8.0	0.6
10	10.0	0.6
12.5	13.0	0.6/0.8
16	16.0	0.8
18	20.0	0.8


DZ Type

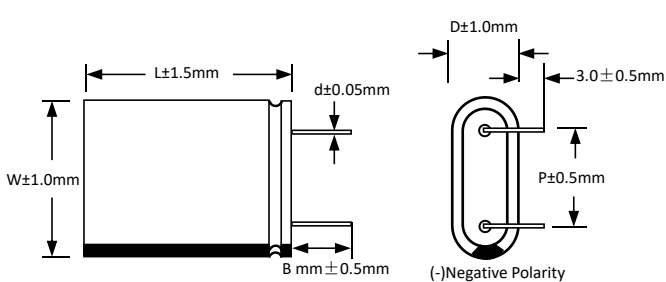


D	P(mm)	B(mm)	Φd
4	5.8	2.0	0.5
5	7.5	2.0	0.5
7	10.0	2.0	0.6
8	11.5	2.0	0.6
10	15.5	2.0	0.6
12.5	17.5	2.0	0.6/0.8
16	23.7	2.0	0.8
18	26.0	2.0	0.8

*for version with bent leads

CL Type

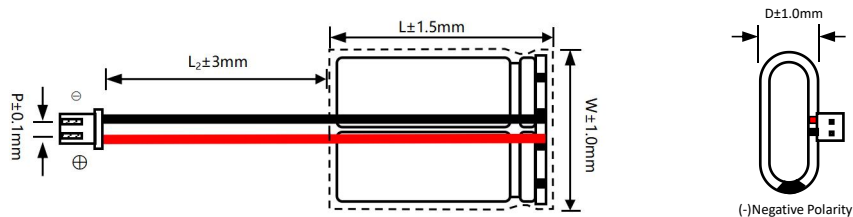

CA Type

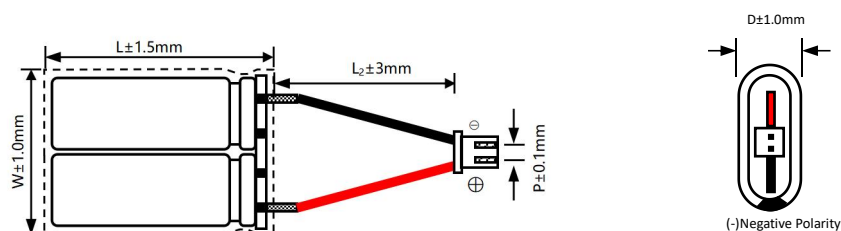

*Connectors can be customized


STANDARD PRODUCTS




Part Number	Rated Voltage (V DC)	Rated Cap (F)	Capacitance Tolerance	Size(mm)			Max.ESR		Maximum Endurance Current 5s (A)	Maximum Peak Current 1s (A)	Maximum Leakage Current (72hrs/mA)	Power Density (W/Kg)	Maximum Energy (W.h)	Energy Density (Wh/kg)
				W	D	L	ESRAC (1kHz/mΩ)	ESRDc (mΩ)						
5.0V Series-Connected Modules														
CHP5R0L104R-TW	5.0	0.1	-10%~+30%	10	5	12	2000	3500	0.09	0.17	0.001	660	0.00035	0.38
CHP5R0L474R-TWX	5.0	0.47	-10%~+30%	13	7	14	400	1000	0.31	0.80	0.006	2143	0.0016	1.17
CHP5R0L474R-TW	5.0	0.47	-10%~+30%	16	8	14	300	1000	0.38	0.86	0.006	2499	0.0016	0.78
CHP5R0L105R-TW	5.0	1.0	-10%~+30%	16	8	18	200	720	0.45	1.45	0.008	1667	0.0035	1.39
CHP5R0L155R-TW	5.0	1.5	-10%~+30%	16	8	22	190	580	0.64	2.01	0.010	1669	0.0052	1.68
CHP5R0L255R-TW	5.0	2.5	-10%~+30%	20	10	22	140	360	0.75	3.29	0.020	1852	0.0087	1.93
CHP5R0L505R-TWX	5.0	5.0	-10%~+30%	25	12.5	22	100	150	1.10	7.14	0.025	2740	0.0174	2.38
CHP5R0L755R-TW	5.0	7.5	-10%~+30%	25	12.5	32	70	160	1.52	8.52	0.065	1953	0.0260	2.71
5.5V Series-Connected Modules(Miniaturized)														
CHP5R5L473R-TW	5.5	0.047	-0%~+100%	9	4	12	2500	3600	0.09	0.17	0.001	550	0.00020	0.18
CHP5R5L104R-TW	5.5	0.1	-10%~+30%	10	5	12	900	1800	0.09	0.17	0.001	660	0.00042	0.38
CHP5R5L124R-TW	5.5	0.12	-10%~+30%	9	4	12	2000	3600	0.09	0.17	0.001	693	0.00045	0.38
CHP5R5L224R-TWX	5.5	0.22	-10%~+30%	10	5	14	800	1500	0.12	0.42	0.002	1117	0.00092	0.92
CHP5R5L224R-TW	5.5	0.22	-10%~+30%	13	7	14	400	800	0.14	0.60	0.006	3025	0.00092	1.00
CHP5R5L474R-TWQ	5.5	0.47	-10%~+30%	9	4	27	1100	1800	0.18	0.54	0.003	2046	0.0019	1.78
CHP5R5L504R-TWX	5.5	0.5	-10%~+30%	13	7	14	400	1000	0.16	0.66	0.006	2499	0.0020	1.36
CHP5R5L155R-TWQ	5.5	1.5	-10%~+30%	13	7	24	190	380	0.53	2.71	0.010	2880	0.0070	3.00
CHP5R5L205R-TWQ	5.5	2.0	-10%~+30%	13	7	27	190	380	0.56	3.00	0.010	2400	0.0090	3.33
5.5V Series-Connected Modules														
CHP5R5L334R- TW	5.5	0.33	-0%~+30%	16	8	14	300	600	0.34	0.90	0.006	3084	0.0019	1.00
CHP5R5L474R-TW	5.5	0.47	-10%~+30%	16	8	14	300	600	0.47	1.05	0.006	3601	0.0019	0.91
CHP5R5L504R-TW	5.5	0.50	-10%~+30%	16	8	14	300	600	0.50	1.05	0.006	3184	0.0020	1.00
CHP5R5L105R-TW	5.5	1.0	-10%~+30%	16	8	14	360	540	0.44	1.79	0.006	2923	0.0042	1.83
CHP5R5L105R-TWX	5.5	1.0	-10%~+30%	16	8	18	240	360	0.61	2.02	0.010	4201	0.0042	1.75
CHP5R5L105R-TWQ	5.5	1.0	-10%~+30%	16	8	22	200	400	0.74	2.12	0.012	4172	0.0042	2.05
CHP5R5L155R-TW	5.5	1.5	-10%~+30%	16	8	22	200	300	0.74	2.84	0.012	4172	0.0063	2.17
CHP5R5L155R-TWX	5.5	1.5	-10%~+30%	16	8	18	260	320	0.59	2.60	0.012	3723	0.0063	2.52
CHP5R5L205R-TW	5.5	2.0	-10%~+30%	16	8	22	200	300	0.74	3.38	0.015	3307	0.0100	2.17
CHP5R5L255R-TWV	5.5	2.5	-20%~+20%	16	8	22	180	360	0.59	3.07	0.012	1643	0.0105	2.28
CHP5R5L255R-TW	5.5	2.5	-10%~+30%	20	10	22	150	225	0.97	4.40	0.015	3361	0.0105	2.19
CHP5R5L255R-TWX	5.5	2.5	-10%~+30%	20	10	18	180	270	0.80	4.10	0.015	3056	0.0105	2.39
CHP5R5L255R-TWQ	5.5	2.5	-10%~+30%	16	8	27	160	330	0.75	4.05	0.017	3045	0.0103	2.85
CHP5R5L305R-TW	5.5	3.0	-10%~+30%	20	10	22	150	225	0.97	4.93	0.020	3361	0.0126	2.63
CHP5R5L355R-TW	5.5	3.5	-10%~+30%	20	10	22	150	225	0.97	5.38	0.020	3361	0.0147	3.06
CHP5R5L355R-TWQ	5.5	3.5	-20%~+20%	16	8	27	120	180	1.20	5.90	0.020	3667	0.0147	3.06
CHP5R5L405R-TW	5.5	4.0	-0%~+30%	20	10	27	150	315	1.17	5.35	0.028	2063	0.0147	2.70
CHP5R5L405R-TWX	5.5	4.0	-0%~+30%	25	12.5	22	90	135	1.42	8.21	0.030	3634	0.0210	2.84
CHP5R5L505R-TW	5.5	5.0	-10%~+30%	20	10	27	150	315	1.17	5.35	0.028	2063	0.0147	2.70
CHP5R5L505R-TWX	5.5	5.0	-10%~+30%	25	12.5	22	90	135	1.42	8.21	0.030	3634	0.0210	2.84
CHP5R5L505R-TWQ	5.5	5.0	-10%~+30%	20	10	32	90	135	1.51	8.21	0.030	4074	0.0210	3.18
CHP5R5L505R-TWV	5.5	5.0	-20%~+20%	16	8	32	120	250	1.16	7.11	0.028	3630	0.0210	4.20
CHP5R5L755R-TW	5.5	7.5	-10%~+30%	25	12.5	28	100	160	1.80	10.66	0.070	3359	0.0152	3.50
CHP5R5L755R-TWQ	5.5	7.5	-10%~+30%	25	12.5	32	70	105	1.93	11.54	0.052	3841	0.0315	3.50
CHP5R5L106R-TW	5.5	10	-10%~+30%	25	12.5	28	96	140	1.95	11.25	0.055	3362	0.0315	4.20
CHP5R5L106R-TWQ	5.5	10	-10%~+30%	25	12.5	32	70	105	1.93	13.42	0.055	3841	0.0420	4.67
CHP5R5L106R-TWX	5.5	10	-10%~+30%	25	12.5	37	60	90	2.23	14.47	0.056	3507	0.0420	3.65
CHP5R5L126R-TW	5.5	12	-10%~+30%	32	16	27	50	75	2.41	17.74	0.068	3103	0.0525	3.37
CHP5R5L156R-TW	5.5	15	-10%~+30%	32	16	32	70	120	2.09	15.00	0.095	1952	0.0525	3.40
CHP5R5L206R-TW	5.5	20	-10%~+30%	36	18	42	36	54	3.52	26.44	0.088	2988	0.0840	3.73
CHP5R5L206R-TWX	5.5	20	-10%~+30%	36	18	37	43	72	3.1	20.54	0.080	2345	0.0735	3.65
CHP5R5L256R-TW	5.5	25	-10%~+30%	36	18	42	40	60	4.34	27.50	0.110	2161	0.1050	3.80
CHP5R5L306R-TW	5.5	30	-10%~+30%	36	18	42	35	50	4.64	33.00	0.120	2503	0.1260	4.30
CHP5R5L416R-TW	5.5	41	-20%~+20%	36	18	42	45	60	3.55	31.53	0.250	1897	0.1300	4.80
CHP5R5L506R-TW	5.5	50	-10%~+30%	36	18	62	30	45	6.04	42.31	0.300	1939	0.2101	5.00
CHP5R5L606R-TW	5.5	60	-10%~+30%	36	18	62	25	40	7.20	50.47	0.25	2047	0.1910	5.90

Note: Adds passive balance. Balance options can be provided upon request. Customers can choose according to the application.


CAPACITANCE VS. TEMPERATURE

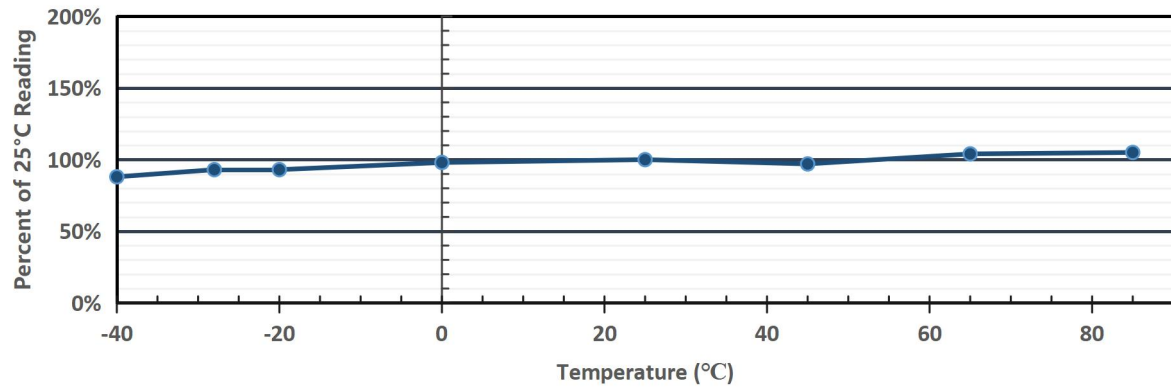

LEAKAGE CURRENT VS. TEMPERATURE

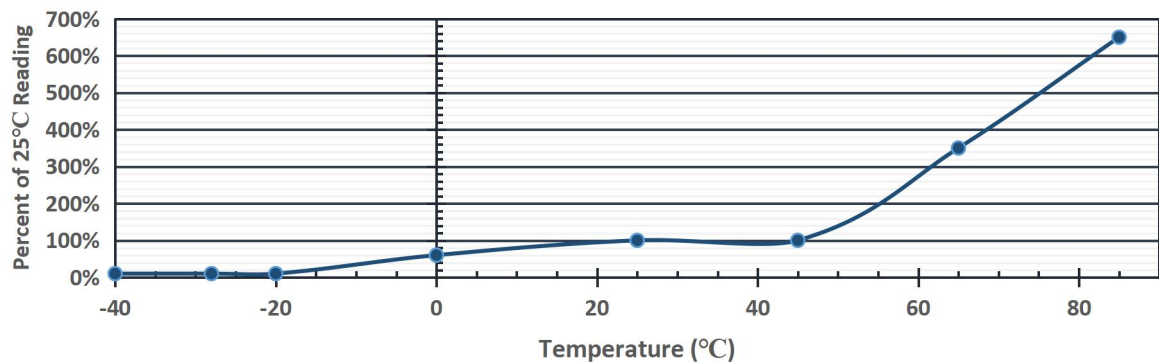

EQUIVALENT SERIES RESISTANCE VS. TEMPERATURE

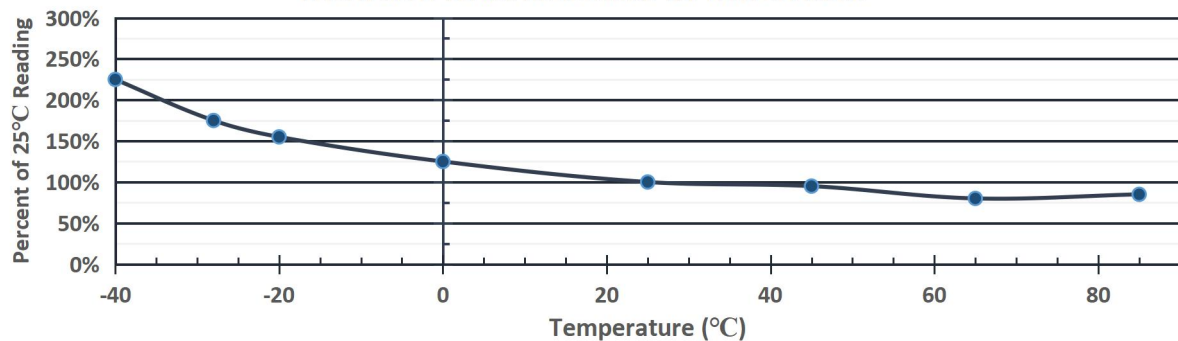

LIFE TIME AND TEMPERATURE PERFORMANCE

The life of a Super Capacitors is impacted by a combination of operating voltage and the operating temperature according to the following equation :

$$L = L_0 \times 3.25^{\frac{T_0 - T}{10}} \times 1.52^{\frac{V_0 - V}{0.1}}$$

L : is the theoretical lifetime at T temperature;


L_0 : is the working life of the highest rated working temperature;

T : is the actual working temperature;

T_0 : is the highest rated working temperature;

V : is the actual working voltage;

V_0 : is the highest rated working voltage.

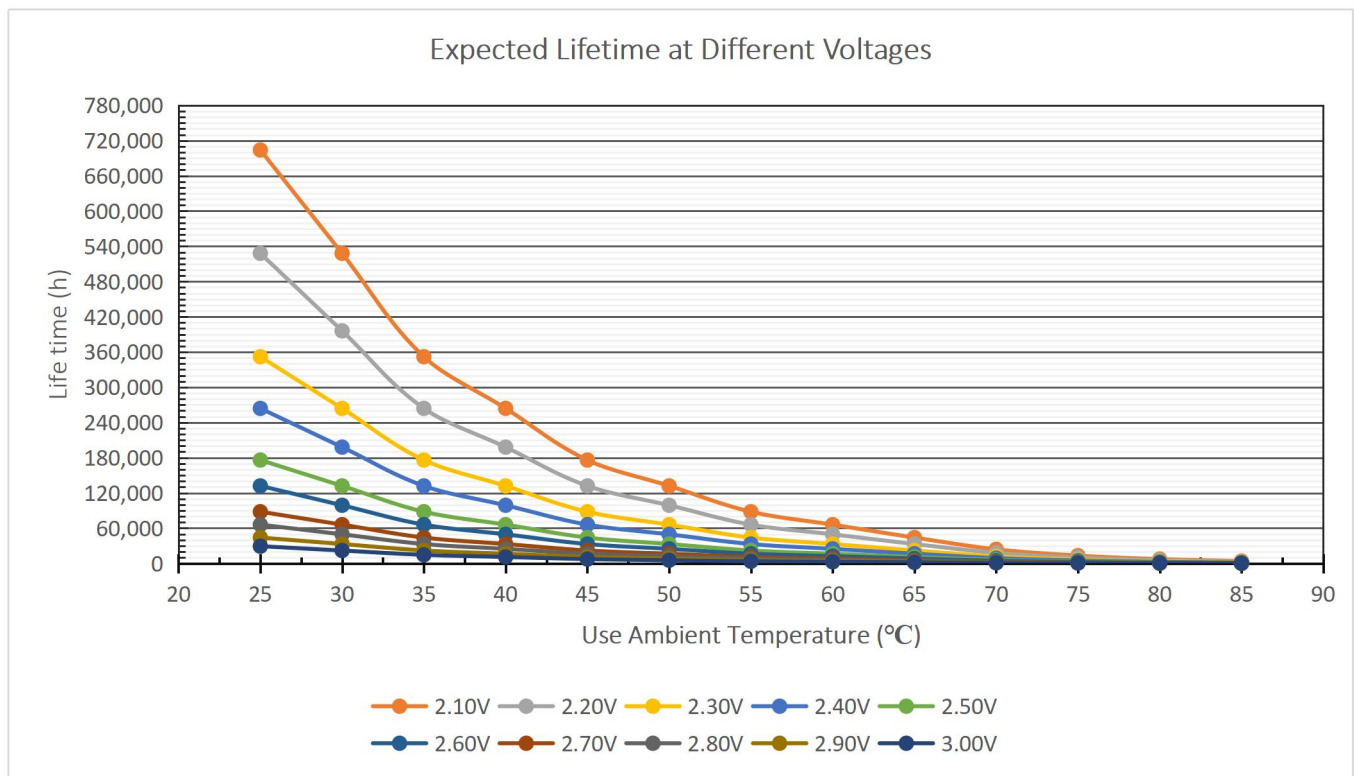

*Note : Estimated lifespan: The estimated lifespan under different operating voltages and operating temperatures in a theoretical environment. For the actual service life, please contact us to discuss the working conditions.



SAFETY RECOMMENDATIONS

WARNINGS

- To Avoid Short Circuit, after usage or test, SuperCapacitors voltage needs to discharge to $\leq 0.1V$.
- Do not Apply Over-voltage, Reverse Charge, Burn or Heat Higher than $150^{\circ}C$, explosion-proof valve may break open.
- Do not Press, Damage or disassemble the SuperCapacitor, housing could heat to high temperature causing Burns.
- If you observe Overheating or Burning Smell from the capacitor disconnect Power immediately, and do not touch.

Emergency Handling

In case of leakage from the housing:

- Skin contact: Immediately clean the contacted area thoroughly with soap and water.
- Eye contact: Rinse with running water or normal saline, and seek medical attention immediately.
- Ingestion: Immediately rinse the contacted areas (such as the mouth) with water, and seek medical attention.

Precautions for Polarity and Reverse Voltage Usage

To ensure product consistency and optimal performance, it is recommended to use the capacitor in accordance with the marked polarity. Reverse polarity may cause permanent damage to the circuit, including a significant increase in leakage current within a short period of time, and will shorten the service life of the supercapacitor.

In practical applications, it is necessary to strictly confirm the connection in accordance with the circuit design and the polarity markings on the capacitor body (such as "+" and "-" symbols, differences in pin length, etc.) to avoid the application of reverse voltage.

PRECAUTIONS FOR WELDING

When soldering supercapacitors to a PCB, the temperature & time that the body of the supercapacitor sees during soldering can have a negative effect on performance. We advise following these guidelines:

- Do not immerse the supercapacitors in solder. Only the leads should come in contact with the solder.
- Ensure that the body of the supercapacitor is never in contact with the molten solder, the PCB or other components during soldering.
- Excessive temperatures or excessive temperature cycling during soldering may cause the safety vent to burst or the case to shrink or crack, potentially damaging the PCB or other components, and significantly reduce the life of the capacitor.

HAND SOLDERING

Keep distance between the supercapacitor body and the tip of the soldering iron and the tip should never touch the body of the capacitor. Contact between supercapacitor body and soldering iron will cause extensive damage to the supercapacitor, and change its electrical properties. It is recommended that the soldering iron temperature should be less than $350^{\circ}C$, and contact time should be limited to less than 4 seconds. Too much exposure to terminal heat during soldering can cause heat to transfer to the body of the supercapacitor, potentially damaging the electrical properties of the supercapacitor.

REGULATORY

- MSDS
- RoHS Compliant
- Reach Compliant

TRANSPORTATION

Not subjected to US DOT or IATA regulations

UN3499, <10Wh, Non-Hazardous Goods

International shipping description –

"Electronic Products – Capacitor"

Storage Requirements

The storage temperature range of the capacitor is $-40^{\circ}C$ to $+70^{\circ}C$, with a relative humidity of $< 60\%$. Lower storage temperatures are preferable, as they can extend the capacitor's shelf life. For products where the production date code indicates storage duration of more than 1 year but less than 2 years, it is recommended to perform recharge activation for at least 24 hours before initial use.

Optimal Storage Conditions

- Temperature: $25^{\circ}C$, relative humidity: $\leq 60\%$, with no voltage applied.
- Avoid direct exposure to sunlight.
- Prevent direct contact with water, salt, oil, or other chemicals.
- Prevent direct contact with corrosive substances, acids, alkalis, or toxic gases.
- Avoid storage in dusty environments.
- Avoid storage in environments with shock and vibration.

WAVE SOLDERING

Only use wave soldering on Radial type supercapacitors. The PCB should be preheated only from the bottom and for less than 60 seconds, with temperature at, or below, $100^{\circ}C$ on the top side of the board for PCBs equal to or greater than 0.8 mm thick.

Solder Temperature ($^{\circ}C$)	Suggested Solder Time (s)	Maximum Solder Time (s)
220	7	9
240	7	9
250	5	7
260	3	5

Selective wave soldering		
Solder Temperature ($^{\circ}C$)	Suggested Solder Time (s)	Maximum Solder Time (s)
290	2	4

***Caution:** For all products with PET sleeves, the use of any type of cleaning agent is prohibited for cleaning.

During all welding processes, it is recommended to protect the shrink film from contact with any liquids (including but not limited to: water, strong acids, strong alkalis, strong oxidizing solutions, and strong solvents), so as to avoid the risk of damage, cracking, and discoloration of the outer shrink film.