



FEATURES

- High power,high energy density
- Long cycle life,maintenance-free
- 6.0V High Operating Voltage
- Lead terminals can be customized
- Low ESR, Low Leakage Current
- REACH,RoHS Directive Compliant

APPLICATIONS

- Camera Flash,System Energy,Harvesting GSM/GPRS
- Pulse Applications, UPS/Industrial,Wireless Alarms
- Remote Metering, Scanners, Toys and Games

OPERATING TEMPERATURE RANGE

- -40°C to +65°C @6.0V 65°C for 1000 Hours
- -40°C to +85°C @5.0V 85°C for 1000 Hours

GENERAL SPECIFICATIONS

Item	Performance
Operating temperature	-40°C to +65°C
Capacitance range	0.10F to 60F
Rated voltage	6.0 V
Surge voltage	6.2 V
Temperature characteristics	Capacitance change: Within $\pm 30\%$ of initial measured value at +25°C Internal resistance: Within $\pm 200\%$ of initial measured value at +25°C
High temperature load time	After 65°C 1000 hours : Capacitance change: $\pm 30\%$ of initial rated value Internal resistance: Within 2 times of initial specified value
Projected cycle life (From rated voltage to 1/2 rated voltage at 25°C)	After 500,000 cycles: Capacitance change: Within $\pm 30\%$ of initial rated value Internal resistance: Within 2 times of initial specified value
Humidity characteristic	Relative humidity: 90%~95% /Duration of testing:240 hrs /Temperature:40 \pm 2°C Capacitance change: Within $\pm 30\%$ of initial rated value Internal resistance: Within 2 times of initial specified value
Vibration resistance	Amplitude:1.5mm /Frequency:10~55Hz /Duration: X,Y,Z(2 hrs)/Duration of testing:6 hrs Capacitance change: Within $\pm 30\%$ of initial rated value Internal resistance: Within 2 times of initial specified value
Shelf life	After 2 years at 25°C without load, the capacitor shall meet the specified endurance limits.

PART NUMBER SYSTEM

<u>CSP</u>	<u>6R0</u>	<u>L</u>	<u>105</u>	<u>R</u>	<u>TW</u>	<u>*</u>	<u>**</u>
Series	Rated Voltage	Connection Code	Capacity Code	Environmental Code	MFG Code	Special Code	PIN Code


Casing Display:



DIMENSIONS




DA Type

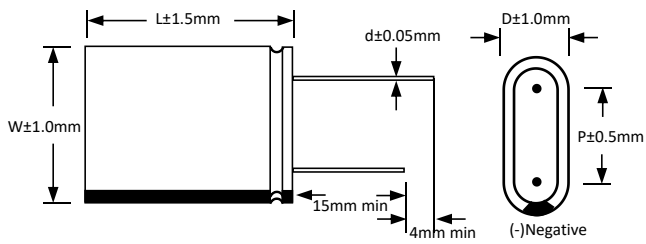


D	P(mm)	Φd
4	5.8	0.5
5	7.5	0.5
7	10.0	0.6
8	11.5	0.6
10	15.5	0.6
13	17.5	0.6/0.8
16	23.7	0.8
18	26.0	0.8

DB Type

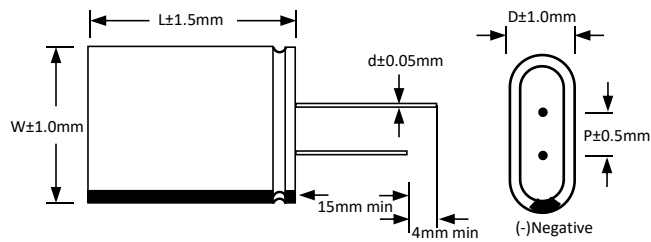


D	P(mm)	Φd
4	2.5	0.5
5	3.5	0.5
7	5.0	0.6
8	5.0	0.6
10	5.5	0.6
13	7.5	0.6/0.8
16	8.5	0.8
18	10.5	0.8

DC Type

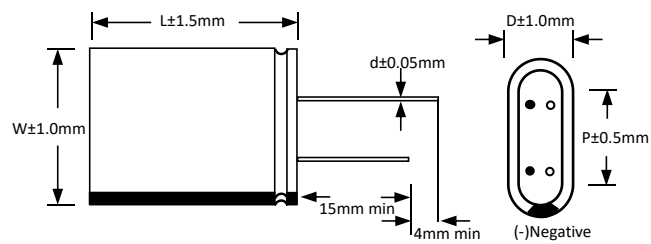

D	P(mm)	Φd
4	/	0.5
5	/	0.5
7	/	0.6
8	8.0	0.6
10	10.0	0.6
13	13.0	0.6/0.8
16	16.0	0.8
18	20.0	0.8


DZ Type

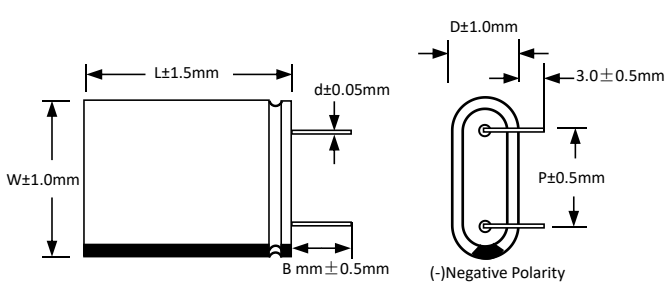


D	P(mm)	B(mm)	Φd
4	5.8	2.0	0.5
5	7.5	2.0	0.5
7	10.0	2.0	0.6
8	11.5	2.0	0.6
10	15.5	2.0	0.6
13	17.5	2.0	0.6/0.8
16	23.7	2.0	0.8
18	26.0	2.0	0.8

*for version with bent leads

CL Type

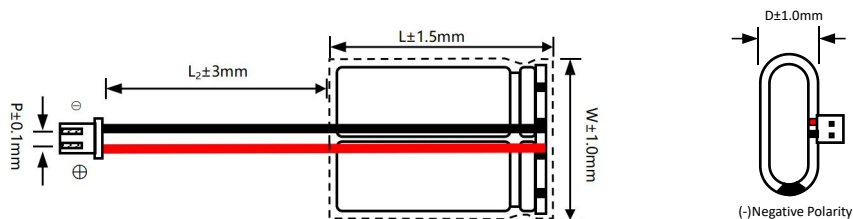

CA Type

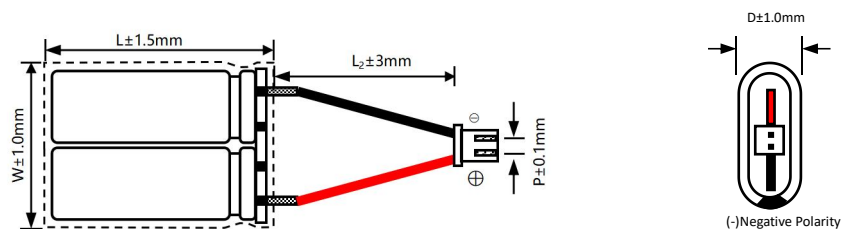

*Connectors can be customized


STANDARD PRODUCTS




Part Number	Rated Voltage (V)	Rated Cap (F)	Capacitance Tolerance	Size(mm)			Max.ESR		Maximum Endurance Current 5s (A)	Maximum Peak Current 1s (A)	Maximum Leakage Current (72hrs/mA)	Power Density (W/Kg)	Maximum Energy (W.h)	Energy Density (Wh/kg)
				W	D	L	ESRAC (1kHz/mΩ)	ESRDC (mΩ)						
6.0V Series-Connected Modules(Miniaturized)														
CSP-6R0L104R-TW	6.0	0.1	-10%~+30%	10	5	12	900	1800	0.10	0.25	0.001	1108	0.0005	0.846
CSP-6R0L124R-TW	6.0	0.12	-10%~+30%	9	4	12	2000	3600	0.09	0.19	0.001	785	0.0005	0.455
CSP-6R0L224R-TW	6.0	0.22	-10%~+30%	10	5	14	900	1700	0.15	0.44	0.002	1108	0.0011	0.846
CSP-6R0L224R-TWX	6.0	0.22	-10%~+30%	13	7	14	400	800	0.18	0.60	0.006	3025	0.0011	1.16
CSP-6R0L474R-TWQ	6.0	0.47	-10%~+30%	9	4	27	1100	1800	0.18	0.54	0.003	2265	0.0022	1.78
CSP-6R0L474R-TWX	6.0	0.47	-0%~+30%	13	7	14	500	1000	0.16	0.67	0.006	2350	0.0022	1.20
CSP-6R0L504R-TWX	6.0	0.50	-10%~+30%	13	7	14	400	800	0.16	0.66	0.006	2499	0.0025	1.36
CSP-6R0L155R-TWQ	6.0	1.5	-10%~+30%	13	7	24	190	380	0.53	2.71	0.010	2880	0.0075	3.00
CSP-6R0L225R-TW	6.0	2.2	-10%~+30%	13	7	27	190	380	0.56	3.00	0.010	2400	0.0100	3.33
6.0V Series-Connected Modules														
CSP-6R0L474R-TW	6.0	0.47	-10%~+30%	16	8	14	320	480	0.47	1.15	0.007	4286	0.0024	1.12
CSP-6R0L504R-TW	6.0	0.50	-10%~+30%	16	8	14	350	490	0.50	1.20	0.007	4290	0.0026	1.20
CSP-6R0L105R-TW	6.0	1.0	-10%~+30%	16	8	18	240	360	0.61	2.21	0.012	4762	0.0050	1.98
CSP-6R0L155R-TWX	6.0	1.5	-10%~+30%	16	8	18	260	320	0.59	2.84	0.013	3956	0.0075	2.68
CSP-6R0L155R-TW	6.0	1.5	-10%~+30%	16	8	22	200	300	0.74	3.10	0.014	4729	0.0075	2.46
CSP-6R0L255R-TWX	6.0	2.5	-10%~+30%	16	8	27	180	270	0.87	4.48	0.018	3907	0.0125	3.05
CSP-6R0L255R-TW	6.0	2.5	-10%~+30%	20	10	22	150	225	0.97	4.80	0.018	3810	0.0125	2.48
CSP-6R0L305R-TW	6.0	3.0	-10%~+30%	20	10	22	140	200	0.91	5.80	0.020	4198	0.0175	3.57
CSP-6R0L355R-TW	6.0	3.5	-10%~+30%	20	10	22	140	200	0.98	6.05	0.020	4198	0.0175	3.57
CSP-6R0355R-TWX	6.0	3.5	-20%~+20%	16	8	27	140	240	1.02	5.82	0.028	3156	0.0147	2.94
CSP-6R0L405R-TW	6.0	4.0	-10%~+30%	20	10	27	120	180	1.20	7.89	0.036	4156	0.0250	4.33
CSP-6R0L405R-TWX	6.0	4.0	-10%~+30%	25	13	22	120	180	1.20	7.89	0.036	4156	0.0250	4.33
CSP-6R0L505R-TWX	6.0	5.0	-10%~+30%	25	13	22	90	135	1.42	8.96	0.036	4118	0.0250	3.22
CSP-6R0L505R-TW	6.0	5.0	-10%~+30%	20	10	27	90	135	1.42	8.57	0.036	4118	0.0250	3.22
CSP-6R0L505R-TWQ	6.0	5.0	-10%~+30%	20	10	32	120	150	1.52	8.96	0.036	4235	0.0250	3.68
CSP-6R0L755R-TW	6.0	7.5	-10%~+30%	25	13	27	80	120	1.66	11.84	0.048	4453	0.0375	4.64
CSP-6R0L755R-TWQ	6.0	7.5	-10%~+30%	25	13	32	90	120	1.75	12.84	0.084	3600	0.0375	3.75
CSP-6R0L755R-TWX	6.0	7.5	-10%~+30%	25	13	22	80	150	1.35	10.59	0.030	3600	0.0375	4.69
CSP-6R0L106R-TW	6.0	10	-10%~+30%	25	13	32	70	105	1.93	14.63	0.066	4354	0.0500	5.29
CSP-6R0L106R-TWX	6.0	10	-10%~+30%	25	13	28	60	120	1.66	13.64	0.050	3428	0.0500	4.76
CSP-6R0L126R-TW	6.0	12	-10%~+30%	32	16	27	50	75	2.41	19.35	0.082	3516	0.0625	3.82
CSP-6R0L156R-TW	6.0	15	-10%~+30%	32	16	32	40	60	2.92	23.68	0.090	3815	0.0750	3.97
CSP-6R0L256R-TW	6.0	25	-10%~+30%	37	18	42	32	64	3.96	34.09	0.126	3213	0.1250	4.46
CSP-6R0L306R-TW	6.0	30	-10%~+30%	37	18	42	30	45	4.07	38.30	0.145	3165	0.1500	4.95
CSP-6R0L506R-TW	6.0	50	-10%~+30%	37	18	62	25	50	5.27	50.85	0.260	2494	0.2500	5.63
CSP-6R0L606R-TW	6.0	60	-10%~+30%	37	18	62	24	48	5.57	58.06	0.280	2761	0.3000	6.71

Note: Passive balance is added. Balance options can be provided upon request, and customers can choose according to their application.


CAPACITANCE VS. TEMPERATURE

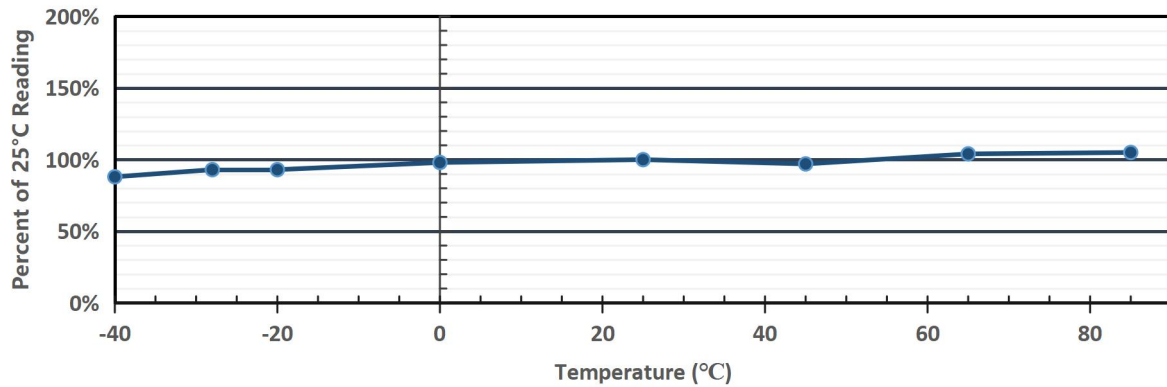

LEAKAGE CURRENT VS. TEMPERATURE

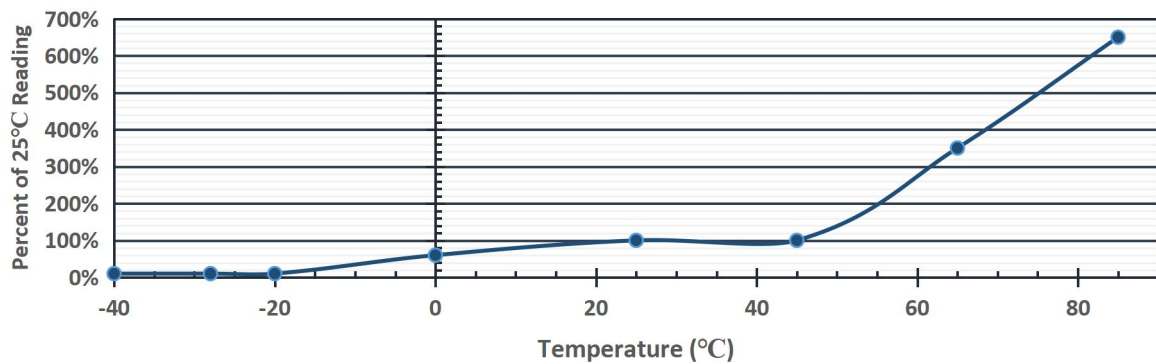

EQUIVALENT SERIES RESISTANCE VS. TEMPERATURE

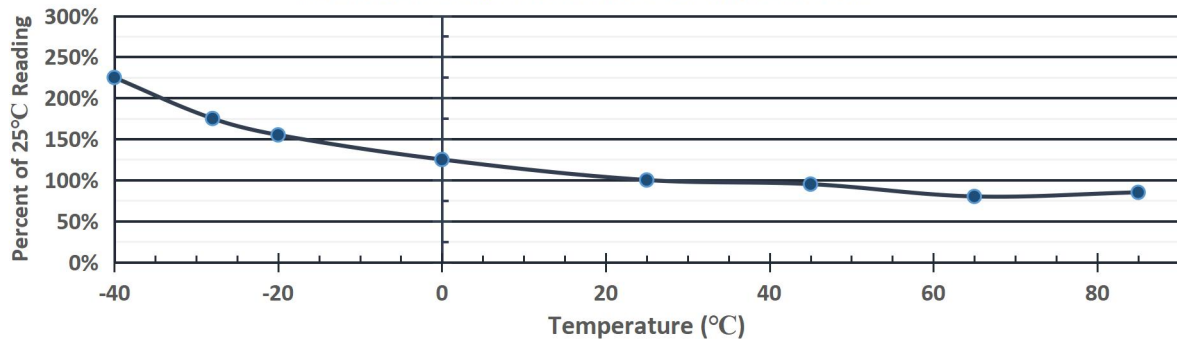

LIFE TIME AND TEMPERATURE PERFORMANCE



The life of a Super Capacitor is impacted by a combination of operating voltage and the operating temperature according to the following equation :

$$L = L_0 \times 3.25^{\frac{T_0 - T}{10}} \times 1.52^{\frac{V_0 - V}{0.1}}$$

L : is the theoretical lifetime at T temperature;


L_0 : is the working life of the highest rated working temperature;

T : is the actual working temperature;

T_0 : is the highest rated working temperature;

V : is the actual working voltage;

V_0 : is the highest rated working voltage.

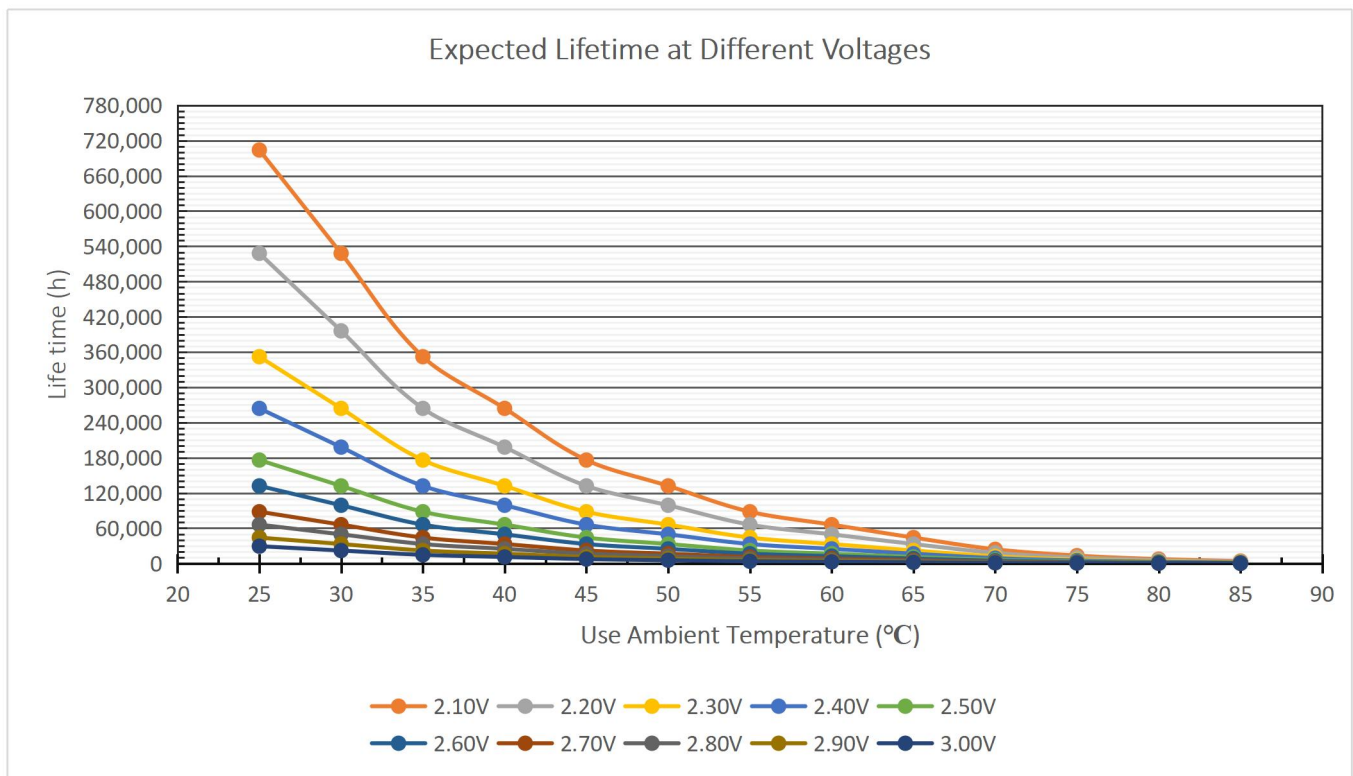

*Note : Estimated lifespan: The estimated lifespan under different operating voltages and operating temperatures in a theoretical environment. For the actual service life, please contact us to discuss the working conditions.



SAFETY RECOMMENDATIONS

WARNINGS

- To Avoid Short Circuit, after usage or test, SuperCapacitors voltage needs to discharge to $\leq 0.1V$.
- Do not Apply Over-voltage, Reverse Charge, Burn or Heat Higher than $150^{\circ}C$, explosion-proof valve may break open.
- Do not Press, Damage or disassemble the SuperCapacitor, housing could heat to high temperature causing Burns.
- If you observe Overheating or Burning Smell from the capacitor disconnect Power immediately, and do not touch.

Emergency Handling

In case of leakage from the housing:

- Skin contact: Immediately clean the contacted area thoroughly with soap and water.
- Eye contact: Rinse with running water or normal saline, and seek medical attention immediately.
- Ingestion: Immediately rinse the contacted areas (such as the mouth) with water, and seek medical attention.

Precautions for Polarity and Reverse Voltage Usage

To ensure product consistency and optimal performance, it is recommended to use the capacitor in accordance with the marked polarity. Reverse polarity may cause permanent damage to the circuit, including a significant increase in leakage current within a short period of time, and will shorten the service life of the supercapacitor.

In practical applications, it is necessary to strictly confirm the connection in accordance with the circuit design and the polarity markings on the capacitor body (such as "+" and "-" symbols, differences in pin length, etc.) to avoid the application of reverse voltage.

PRECAUTIONS FOR WELDING

When soldering supercapacitors to a PCB, the temperature & time that the body of the supercapacitor sees during soldering can have a negative effect on performance. We advise following these guidelines:

- Do not immerse the supercapacitors in solder. Only the leads should come in contact with the solder.
- Ensure that the body of the supercapacitor is never in contact with the molten solder, the PCB or other components during soldering.
- Excessive temperatures or excessive temperature cycling during soldering may cause the safety vent to burst or the case to shrink or crack, potentially damaging the PCB or other components, and significantly reduce the life of the capacitor.

HAND SOLDERING

Keep distance between the supercapacitor body and the tip of the soldering iron and the tip should never touch the body of the capacitor. Contact between supercapacitor body and soldering iron will cause extensive damage to the supercapacitor, and change its electrical properties. It is recommended that the soldering iron temperature should be less than $350^{\circ}C$, and contact time should be limited to less than 4 seconds. Too much exposure to terminal heat during soldering can cause heat to transfer to the body of the supercapacitor, potentially damaging the electrical properties of the supercapacitor.

REGULATORY

- MSDS
- RoHS Compliant
- Reach Compliant

TRANSPORTATION

Not subjected to US DOT or IATA regulations
UN3499, <10Wh, Non-Hazardous Goods
International shipping description –
"Electronic Products – Capacitor"

Storage Requirements

The storage temperature range of the capacitor is $-40^{\circ}C$ to $+70^{\circ}C$, with a relative humidity of < 60%. Lower storage temperatures are preferable, as they can extend the capacitor's shelf life. For products where the production date code indicates storage duration of more than 1 year but less than 2 years, it is recommended to perform recharge activation for at least 24 hours before initial use.

Optimal Storage Conditions

- Temperature: $25^{\circ}C$, relative humidity: $\leq 60\%$, with no voltage applied.
- Avoid direct exposure to sunlight.
- Prevent direct contact with water, salt, oil, or other chemicals.
- Prevent direct contact with corrosive substances, acids, alkalis, or toxic gases.
- Avoid storage in dusty environments.
- Avoid storage in environments with shock and vibration.

WAVE SOLDERING

Only use wave soldering on Radial type supercapacitors. The PCB should be preheated only from the bottom and for less than 60 seconds, with temperature at, or below, $100^{\circ}C$ on the top side of the board for PCBs equal to or greater than 0.8 mm thick.

Solder Temperature ($^{\circ}C$)	Suggested Solder Time (s)	Maximum Solder Time (s)
220	7	9
240	7	9
250	5	7
260	3	5

Selective wave soldering		
Solder Temperature ($^{\circ}C$)	Suggested Solder Time (s)	Maximum Solder Time (s)
290	2	4

***Caution:** For all products with PET sleeves, the use of any type of cleaning agent is prohibited for cleaning.
During all welding processes, it is recommended to protect the shrink film from contact with any liquids (including but not limited to: water, strong acids, strong alkalis, strong oxidizing solutions, and strong solvents), so as to avoid the risk of damage, cracking, and discoloration of the outer shrink film.