
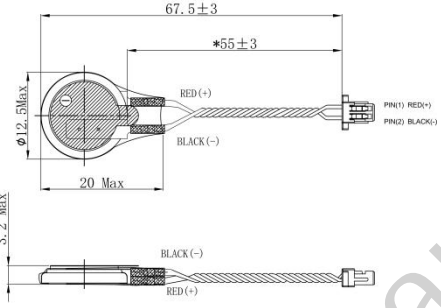
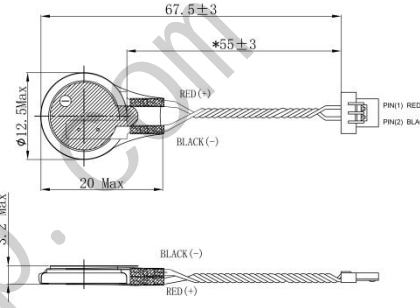
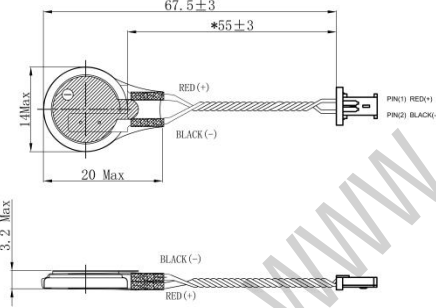
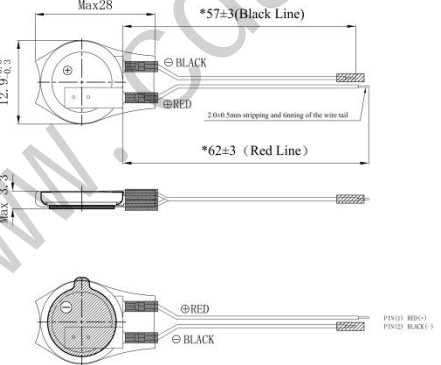
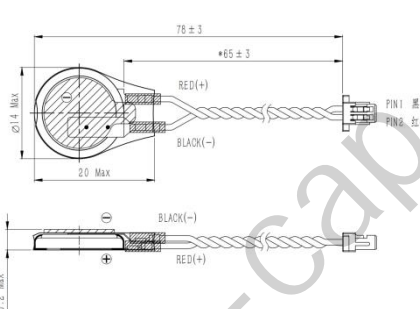
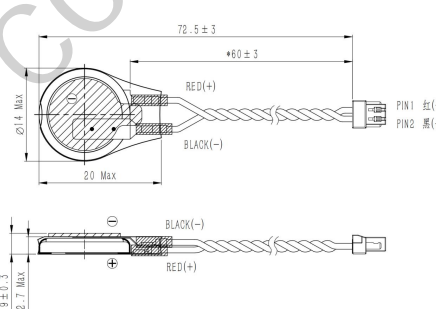
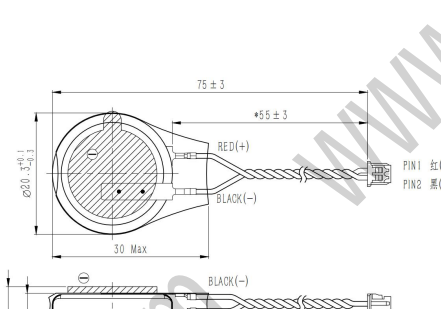
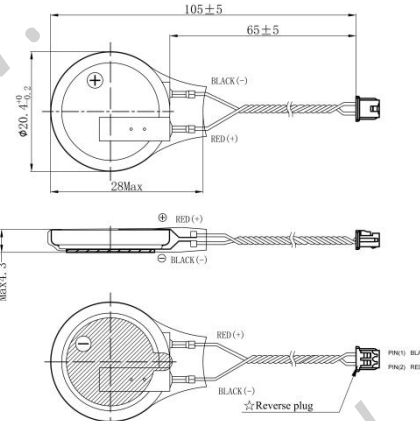


Dimensions with terminals and wire connector (Unit: mm)

ML1220/1HT55	ML1220/1MT55	ML1220/1BT55
 <p>Lead wire: UL3302/28AWG Connector: JST SHR-02V-S-B Adhesive: 3M 9888T+black PE; φ10*0.5 with ears</p>	 <p>Lead wire: UL3302/28AWG Connector: ACES 50285 Adhesive: 3M 9888T+black PE; φ10*0.5 with ears</p>	 <p>Lead wire: UL3302/28AWG Connector: ACES 50280 Adhesive: 3M 9888T+black PE; φ10*0.5 with ears</p>
ML1220/1S62	ML1220/1HFT65	ML1220/1CPT6
 <p>Lead wire: UL1007/26AWG Adhesive: 3M 9888T+black PE; φ10*0.5 with ears</p>	 <p>Lead wire: UL3302/28AWG Connector: JCTC11002H00-2P-HF Adhesive: 3M 9888T+black PE; φ10*0.5 with ears</p>	 <p>Lead wire: UL10625/32AWG Connector: JCTC50801H00-2P-HF Adhesive: 3M 9888T+black PE; φ10*0.5 with ears</p>
ML2032/1ST55	ML2032/1SFT65	ML2430/1SPT35
 <p>Lead wire: UL1571/28AWG Connector: JCTC11251H00-2P-HF Adhesive: 3M 4950+black PE; φ15*1.1 with ears</p>	 <p>Lead wire: UL1571/26AWG Connector: JST ZHR-2 Adhesive: 3M 9888T+black PE; φ15*0.5 with ears</p>	 <p>Lead wire: UL1007/26AWG Connector: JST PHR-3 Adhesive: 3M 9888T+black PE; φ19*1.1 with ears</p>

* The following configuration types can be customized according to customer needs with corresponding pin type/pin pitch and different terminal types.

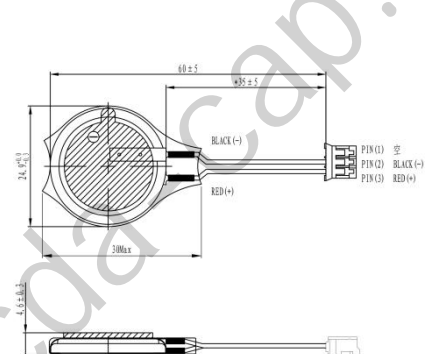